

Keystone Jack

90-Degree

UTP 90-Degree. T568A/B, 110 IDC

CAT-5e



SC-CAT5J (White)



SC-CAT5J-BK (Black)



SC-CAT5J-BL (Blue)



SC-CAT5J-GN (Green)



SC-CAT5J-RD (Red)



SC-CAT5J-YL (Yellow)

I. Product Details

Unscreened Category 5e Keystone Jack, with dual 568A/B wiring label

II. Applicable specifications:







- Draft amendment 1 ISO/IEC 11801 2nd edition:2002, 25N1173
- Draft ISO/IEC TR 24750
- Draft ANSI/TIA/EIA-568-B.2 addendum 10
- Draft IEEE 802.3an
- Draft ANSI/TIA/EIA TSB-155

III. Electrical Specification

1. Insulation Resistance: $\geq 500 \text{ M}\Omega$
2. Dielectric Withstand Volt: 100VAC RMS 60Hz
3. Contact Resistance $\leq 20 \text{ m}\Omega$
4. Current Rating: 1.5A at 68°F

IV. Mechanical Specification

1. Plug insertion Life: ≥ 750 times plug in
2. Contact Force 99.2g (3.5oz) FCC Plug
3. Plug Retention Force: 30lb (133n/13.3Kg)
4. Temperature Test: -40 to 150°F (-40 to 66°C)
5. Contact Plating: 50u" over contact area
6. Dual 110/Krone IDC connector

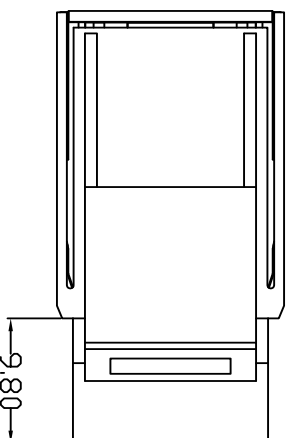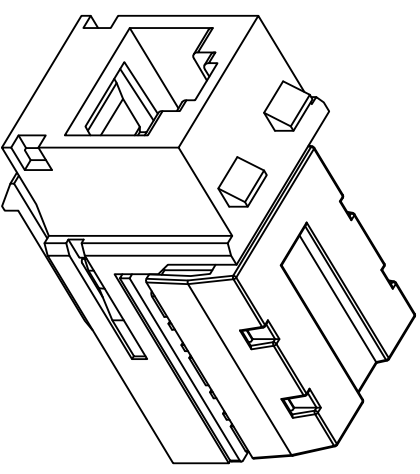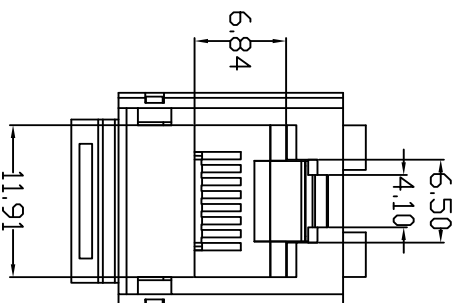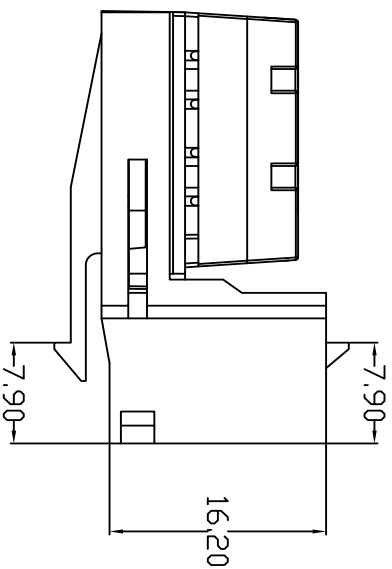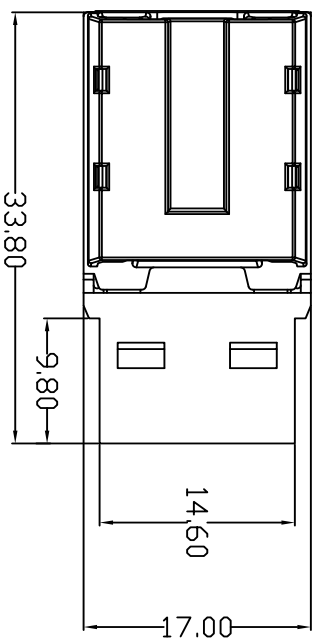

SYN(ONNECT™
Category 5E UTP Keystone Jack