


SYNC PART NUMBER:
SW-AUD162

IN-WALL SPEAKER CABLE
STRANDED BARE COPPER CONDUCTORS
CONDUCTORS TWISTED • OXYGEN FREE COPPER •
PVC INSULATION • SEQUENTIALLY FOOT MARKED • -20°C +75°C

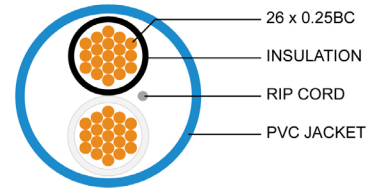

Application

Multi-conductor-audio/sound, control, instrumentation & led lighting cables

Construction	Product Description
2 Core	Oxygen Free Copper Wire Strands
AWG	16
Stranding (wire no./wire dia. mm)	26 x 0.25BC
Number of Conductors	2
Insulation Type	PVC (CM/CMG)
Insulation Thickness (mm)	2.1 +/- 0.1mm
Insulation Colours	White & Black
Jacket Type	PVC (CM/CMG)
Jacket Thickness (mm)	0.58
Nominal Thickness (mm)	5.0 +/- 0.2mm
Ripcord Material	Nylon (150D)
Temperature	Range
Temperature Rating	-20°C to +75°C
Mechanical Characteristics	Physical & Electrical Characteristics (at 20°C)
Conductor DC Resistance	≤ 13.7 Ohms/KM
Insulation Resistance	≥50MΩ/KM
Testing Voltage	50Hz 1Min (wire/wire 50Hz 1min)=1.0KV
Tensile Strength	≥13.8Mpa
Elongation at Break:	≥100%
Certifications	Details
Reelex II	Yes
c(UL)us	Yes
RoHS	COMPLIANT
Flame Test	FT-4

©2022 PROVO LTD.

Provo makes every reasonable effort to ensure their accuracy at the time of this publication. Information and specifications herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability. The information provided is correct to the best of Provo's knowledge, and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes part of. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product. All sales of Provo/SynCable products are subject to Provo's standard terms and conditions of sale.