



SW-CAT6A-S-XXXX



10Gb/s CAT6A Super Slim Ethernet Patch Cable

Bare Copper 28AWG Conductor, UTP Unshielded, PVC Jacket

CAT-6A

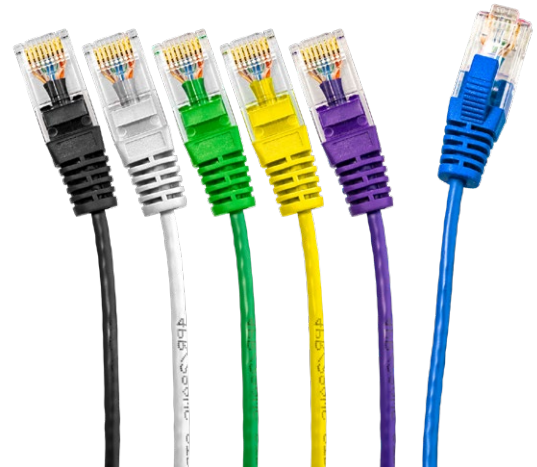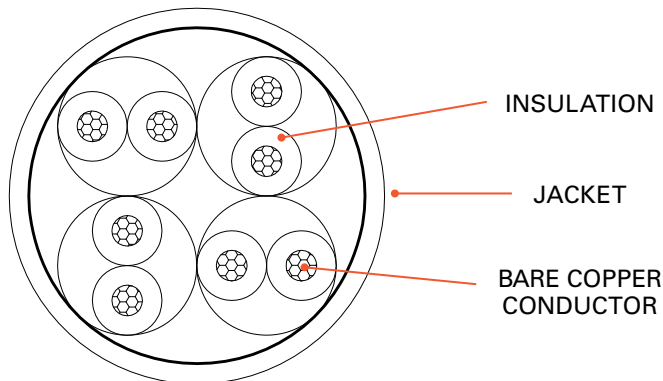

SPECIFICATION

Jacket Type: PVC

Conductor: Bare Copper 28AWG

Performance Frequency: 500MHz

Voltage rating: 300V DC

Insulation Thickness:

MIN: 0.11mm

MAX: 0.13mm

Insulation Diameter (Nominal OD):

0.6mm

Jacket Diameter (Nominal OD):

4.0mm $\pm$ 0.2mm

Temperature Rating: -20°C~75°C

Print Marking:

SYNCABLE CAT6A 10Gbps PATCH CABLE ---


EXXXXXX (UL) c(UL) 4PR/28AWG CMR FT4 75°C ---

ETL VERIFIED TO TIA/EIA 568B.2 ISO/IEC 11801 --- ROHS



**FT-4
RATED**

RoHS

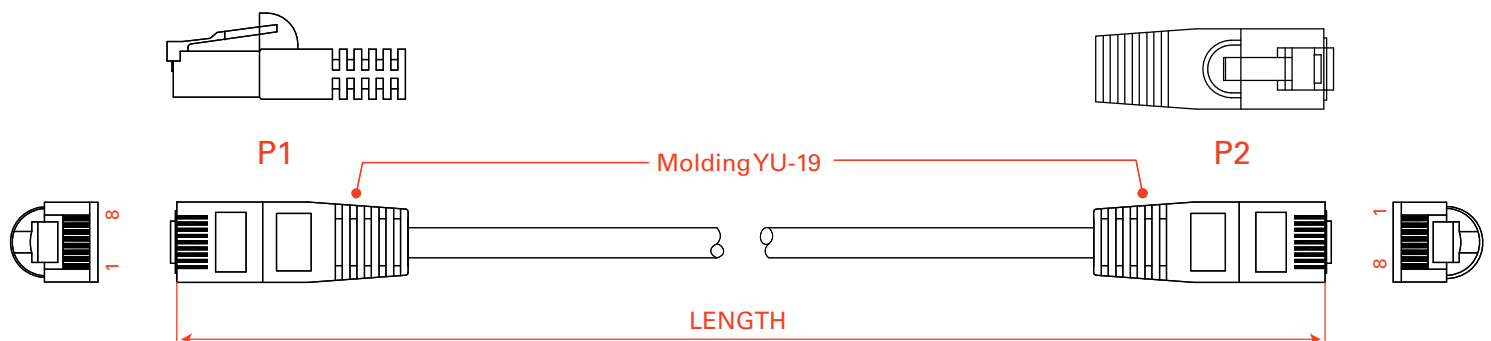

Colour Code: (TIA/EIA 568B.2)

1. White/Orange X Orange
2. White/Green X Blue
3. White/Blue X Green
4. White/Brown X Brown

Ratings and Approvals:

CMR(UL), c(UL),
RoHS Compliant

Distributed in Canada by



620 Rowntree Dairy Rd.
Woodbridge, Ontario L4L 5T8
1-888-797-7686

401 Rue Locke
St. Laurent, Que. H4T 1X7
1-800-361-7349