


SW-HDMI-4K-xxM (10M,12M)

HDMI V2.0 4K Full HD with Ethernet

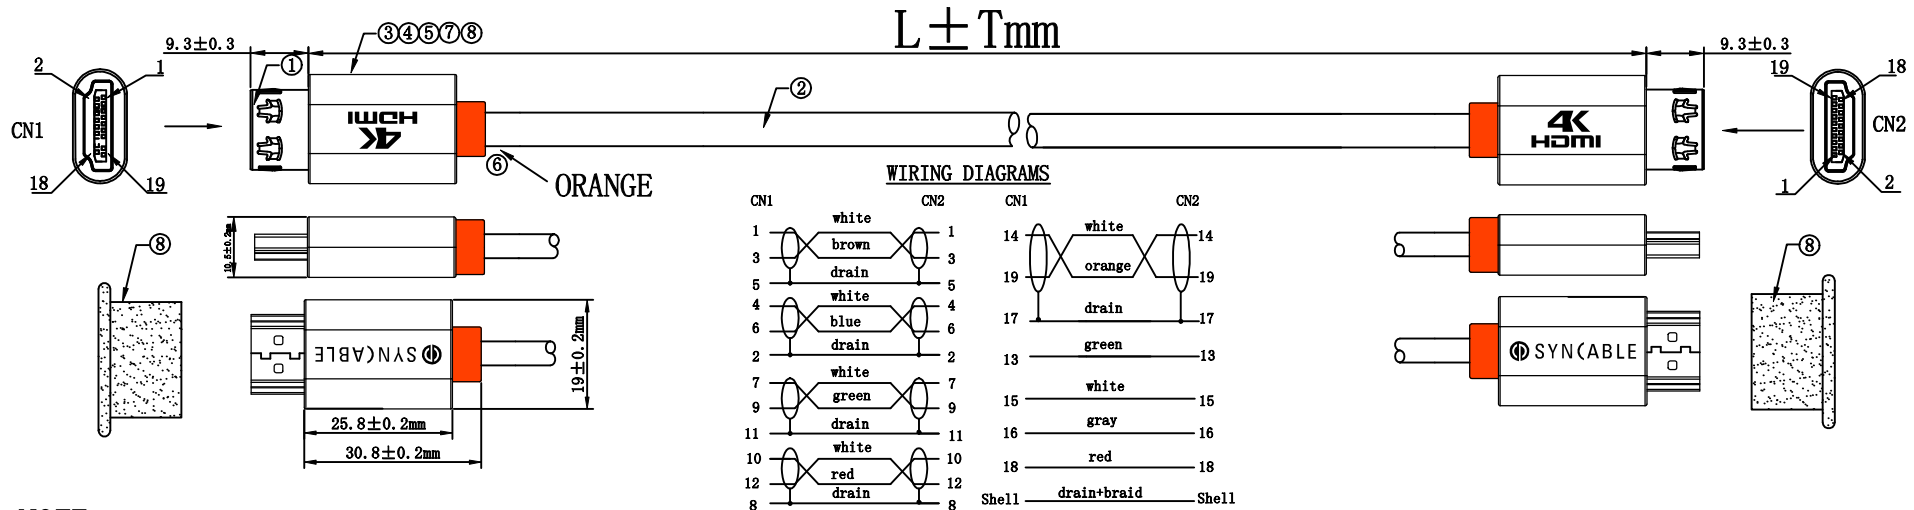

NOTE:

1.ELECTRICAL TEST:

- 100% open short & miss wire test;
 - Insulation resistance:DC 300V 10Mohm min;
 - Contact resistance:* ohm Max;
 - Compression strength: Alternating Voltage:200V/S, 1mA;
- #### 2. RoHS & REACH ;

3.Printing content:SYNCABLE • 4K HDMI 2.0 Cable with Ethernet • 4K@60Hz
 UHD • 18Gbps • HDCP 2.2 • 4:4:4 • ARC • UL EXXXXXX • CL3/FT4 Rated
 4.100% BY 4K*2K@60HZ.

MATERIAL LIST:

⑩	Seizing Wire	COLOR:Black	2pcs
⑨	Dust cover	Undivided edge dust Jacket (transparent color)	2pcs
⑧	Crepe paper	The width of the essay paper(L=**mm)	2pcs
⑦	Tin strip/tin wire	Tin strip / tin wire	*g
⑥	Copper foil	Double-sided conductive strongly viscous copper foil	2pcs
⑤	Over Molding	PVC/Color:orange	*g
④	Inner Molding	LDPE endometrial material	*g
③	Wire clip	Automatic welding clamp 28AWG Black (with single strand copper)	2pcs
②	Cable	HDMI2.0 BC+AEB Jacket:PVC Color:BLACK 144#/0.12mm/AL-MG, 28AWG(1/0.32BC*1P+E+AM)*5P+1/0.254BC*4C+AEB OD:7.0±0.2mm	1pcs
①	HDMI conn	HDMI-AM ,PIN gold plated FU, Gold plating shell.	2pcs

Cutting and winding tolerances

length	Cutting line tolerance	The winding tolerance
10M	10000±200mm	160±10mm
12M	12000±300mm	170±10mm

Distributed in Canada by



620 Rowntree Dairy Rd.
 Woodbridge, Ontario L4L 5T8
 1-888-797-7686

401 Rue Locke
 St. Laurent, Que. H4T 1X7
 1-800-361-7349