




Product Guide



SYNCPRODUCTS™

The SyncProducts brand encompasses the following names, each serving its specific purpose within the home automation low-voltage industry. As you can see, we have a diverse product offering that varies from the cables used to install networking and audio/visual solutions to the connectors, plates, jacks, and equipment itself, such as racks, mounts, speakers, etc.

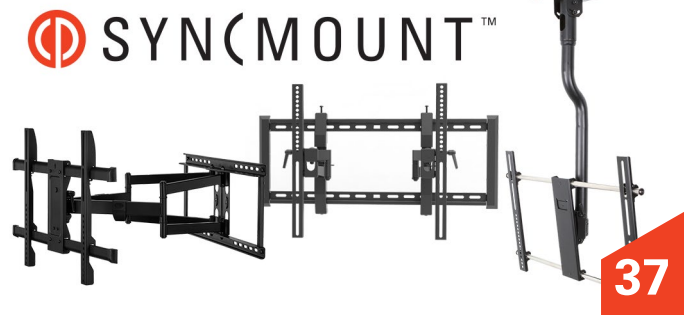


PRODUCT PRICES, SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE. PRODUCTS MAY NOT BE EXACTLY AS ILLUSTRATED AND MAY NOT BE WITHOUT ERRORS OR OMISSIONS. ALL DIGITAL RESELLERS MUST BE APPROVED AND ADHERE TO MSRP.

Pro-Grade **8K** with Locking Clips

Ultra High Speed 8K HDMI® Cables with Ethernet




- High-purity copper conductor
- Aluminum mylar foil and aluminum braid shielding
- HDPE + FPE insulation
- Orange+Black PVC housing with gold-plated connector
- Certified 8K@60Hz or 4K@120Hz Resolution

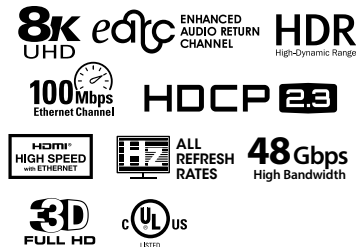


Item Code	Length	Gauge
SW-HDMI-8K-0-5M	0.5 m – 1.64 ft.	30 AWG
SW-HDMI-8K-1M	1.0 m – 3.25 ft.	30 AWG
SW-HDMI-8K-2M	2.0 m – 6.56 ft.	30 AWG
SW-HDMI-8K-3M	3.0 m – 9.84 ft.	28 AWG
SW-HDMI-8K-4M	4.0 m – 13.12 ft.	28 AWG
SW-HDMI-8K-5M	5.0 m – 16.40 ft.	28 AWG
SW-HDMI-8K-6M	6.0 m – 19.68 ft.	28 AWG
SW-HDMI-8K-8M	8.0 m – 26.25 ft.	28 AWG
SW-HDMI-8K-10M	10.0 m – 32.80 ft.	28 AWG

8K SuperSlim with Locking Clips

High Speed HDMI® 4K Cables with Ethernet

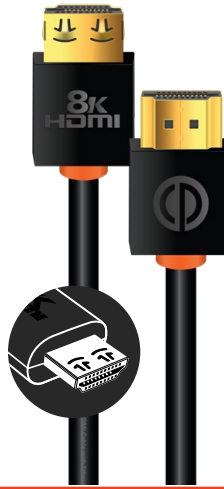

- High-purity copper conductor
- Aluminum mylar foil and aluminum braid shielding
- HDPE + FPE insulation
- Black PVC jacket
- Orange+Black PVC housing with gold-plated connector

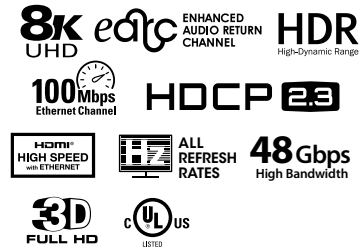


Item Code	Length	Gauge
SW-HDMI-S-8K-0-5M	0.5 m – 1.64 ft.	34 AWG
SW-HDMI-S-8K-1M	1.0 m – 3.25 ft.	34 AWG
SW-HDMI-S-8K-1-5M	1.5 m – 4.92 ft.	34 AWG
SW-HDMI-S-8K-2M	2.0 m – 6.56 ft.	34 AWG

Pro-Grade **4K** with Locking Clips

High Speed 4K HDMI® Cables with Ethernet




- High-purity copper conductor
- Aluminum mylar foil and aluminum braid shielding
- HDPE + FPE insulation
- Orange+Black PVC housing with gold-plated connector
- Certified 4K/60Hz 4:4:4 up to 8 meters

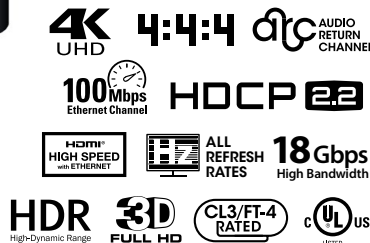

Item Code	Length	Gauge
SW-HDMI-4K-0-5M	0.5 m – 1.64 ft.	30 AWG
SW-HDMI-4K-1M	1.0 m – 3.25 ft.	30 AWG
SW-HDMI-4K-2M	2.0 m – 6.56 ft.	30 AWG
SW-HDMI-4K-3M	3.0 m – 9.84 ft.	30 AWG
SW-HDMI-4K-4M	4.0 m – 13.12 ft.	30 AWG
SW-HDMI-4K-5M	5.0 m – 16.40 ft.	30 AWG
SW-HDMI-4K-6M	6.0 m – 19.68 ft.	28 AWG
SW-HDMI-4K-8M	8.0 m – 26.25 ft.	28 AWG
SW-HDMI-4K-10M	10.0 m – 32.80 ft.	28 AWG
SW-HDMI-4K-12M	12.0 m – 39.37 ft.	26 AWG

Pro-Installer **4K Bulk-Pack**

4K Ultra HD Premium Certified High Speed HDMI® Cables with Ethernet

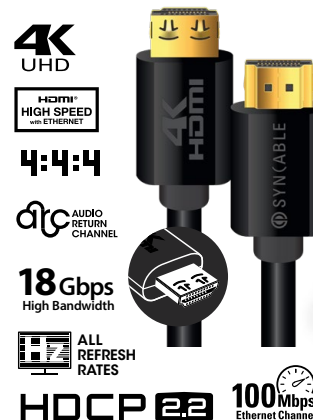

- High-purity copper conductor
- Aluminum mylar foil
- HDPE + FPE insulation
- Black PVC jacket
- HDR compliant
- Black PVC housing with gold-plated connector
- Certified 4K/60Hz 4:4:4

Item Code	Length
SW-PI-HDMI-0-5M-20 (20 per Box)	0.5 m – 1.64 ft.
SW-PI-HDMI-1M-10 (10 per Box)	1.0 m – 3.25 ft.
SW-PI-HDMI-2M-10 (10 per Box)	2.0 m – 6.56 ft.
SW-PI-HDMI-3M-10 (10 per Box)	3.0 m – 9.84 ft.
SW-PI-HDMI-4M-5 (5 per Box)	4.0 m – 13.12 ft.
SW-PI-HDMI-5M-5 (5 per Box)	5.0 m – 16.40 ft.




Pro-Grade 8K FT-4 AOC

Active Optical Cable



- Active Optical Cables use both copper and fiber conductors, for reliable long distance transmission over a lighter and more flexible cable
- No external power required
- Polyethylene insulation
- Orange+Black PVC housing with gold-plated connector

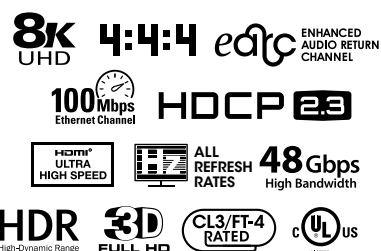


Item Code	Length
SW-HDMI-8K-AOC-15M	15 m – 49.21 ft.
SW-HDMI-8K-AOC-20M	20 m – 65.62 ft.
SW-HDMI-8K-AOC-30M	30 m – 98.40 ft.

Pro-Grade 8K FT-6 AOC

CMP FT-6 Fire Rated Active Optical Cable



- Active Optical Cables use both copper and fiber conductors, for reliable long distance transmission over a lighter and more flexible cable
- No external power required
- Polyethylene insulation
- Orange+Black PVC housing with gold-plated connector
- CMP Fire Rated

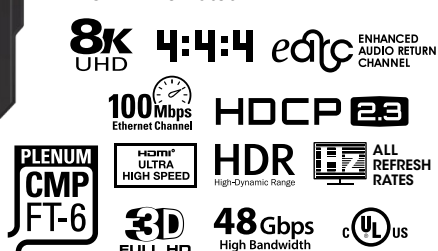


Item Code	Length
SW-HDMI-8K-AOC-FT6-15M	15 m – 49.21 ft.
SW-HDMI-8K-AOC-FT6-20M	20 m – 65.62 ft.
SW-HDMI-8K-AOC-FT6-60M	60 m – 196.85 ft.

Pro-Grade 4K FT-4 AOC

Active Optical Cable



- Active Optical Cables use both copper and fiber conductors, for reliable long distance transmission over a lighter and more flexible cable
- No external power required
- Polyethylene insulation
- Orange+Black PVC housing with gold-plated connector

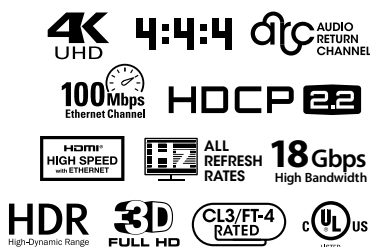


Item Code	Length
SW-HDMI-AOC-15M	15 m – 49.21 ft.
SW-HDMI-AOC-20M	20 m – 65.62 ft.
SW-HDMI-AOC-30M	30 m – 98.40 ft.
SW-HDMI-AOC-45M	45 m – 147.60 ft.
SW-HDMI-AOC-60M	60 m – 196.85 ft.

Pro-Grade 4K FT-6 AOC

CMP FT-6 Fire Rated Active Optical Cable



- Active Optical Cables use both copper and fiber conductors, for reliable long distance transmission over a lighter and more flexible cable
- No external power required
- Polyethylene insulation
- Orange+Black PVC housing with gold-plated connector
- CMP Fire Rated

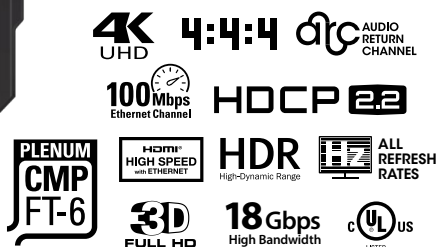

Item Code	Length
SW-HDMI-AOC-FT6-15M	15 m – 49.21 ft.
SW-HDMI-AOC-FT6-20M	20 m – 65.62 ft.
SW-HDMI-AOC-FT6-30M	30 m – 98.40 ft.
SW-HDMI-AOC-FT6-45M	45 m – 147.60 ft.
SW-HDMI-AOC-FT6-60M	60 m – 196.85 ft.

Subwoofer Cable

Superior Performance Audio Cable



- 24 AWG 6N pure OFC
- LDPE dielectric insulation
- Aluminum mylar foil braid shielding
- Black PVC jacket
- Black anodized aluminum housing with gold-plated copper contacts

Item Code	Length
SW-SUB-1M	1.0 m – 3.25 ft.
SW-SUB-4M	4.0 m – 13.12 ft.
SW-SUB-6M	6.0 m – 19.68 ft.
SW-SUB-8M	8.0 m – 26.25 ft.

RCA Audio Interconnect

Superior Performance Audio Cable



- 24 AWG 6N pure OFC
- FPE insulation
- Aluminum mylar foil braid shielding
- Black PVC jacket
- Black anodized aluminum housing with gold-plated copper contacts

Item Code	Length
SW-RCA-0-5M	0.5 m – 1.64 ft.
SW-RCA-1M	1.0 m – 3.25 ft.
SW-RCA-2M	2.0 m – 6.56 ft.
SW-RCA-3M	3.0 m – 9.84 ft.
SW-RCA-6M	6.0 m – 19.68 ft.
SW-RCA-8M	8.0 m – 26.25 ft.
SW-RCA-10M	10.0 m – 32.80 ft.

Fiber Optic Cable

Superior Performance Toslink™ Digital Audio Cable



- Plastic fiber Core conductor
- PE insulation
- Black PVC jacket
- Black anodized aluminum housing gold-plated copper collar
- Polished fiber lens

Item Code	Length
SW-OPTI-1M	1.0 m – 3.25 ft.
SW-OPTI-2M	2.0 m – 6.56 ft.
SW-OPTI-3M	3.0 m – 9.84 ft.
SW-OPTI-4M	4.0 m – 13.12 ft.
SW-OPTI-6M	6.0 m – 19.68 ft.
SW-OPTI-8M	8.0 m – 26.25 ft.
SW-OPTI-12M	12.0 m – 39.37 ft.
SW-OPTI-15M	15.0 m – 49.21 ft.

MP3 Audio Cable

3.5mm Stereo Male to Stereo RCA (Male)



- 24 AWG 6N pure OFC
- FPE insulation
- Aluminum mylar foil braid shielding
- Black PVC jacket
- Black anodized aluminum housing with gold-plated copper contacts

Item Code	Length
SW-MP3-1M	1.0 m – 3.25 ft.
SW-MP3-2M	2.0 m – 6.56 ft.

RCA Y Adapter

RCA (Male) to 2x RCA (Female)



- 24 AWG 6N pure OFC
- FPE insulation
- Aluminum mylar foil braid shielding
- Black PVC jacket
- Black anodized aluminum housing with gold-plated copper contacts
- Split mono output from preamp to 2 devices

Item Code	Length
SW-RCA-MFF	0.2 m – 7.875"

RCA Audio Interconnect

2x RCA (Male) to 2x RCA (Male)



Item Code	Length
SW-STMM-1M	2.0m – 6.56 ft.
SW-STMM-2M	3.0m – 9.84 ft.
SW-STMM-3M	3.0m – 9.84 ft.

MP3 Audio Cable

3.5mm Stereo (Male) to 2x RCA (Female)



Item Code	Length
SW-35RCAMF-2M	2.0m – 6.56 ft.

3.5mm Stereo (Male) to 2x RCA (Male)



Item Code	Length
SW-35RCAMM-2M	2.0m – 6.56 ft.
SW-35RCAMM-3M	3.0m – 9.84 ft.

3.5mm Stereo (Male) to 3.5mm Stereo (Male)



- Gold-plated connectors
- Oxygen-free copper wire core
- 2 Colour molded connectors provide excellent strain relief

Item Code	Length
SW-35MM-1M	1.0 m – 3.25 ft.
SW-35MM-2M	2.0m – 6.56 ft.
SW-35MM-3M	3.0m – 9.84 ft.
SW-35MM-5M	5.0m – 16.40 ft.

WHY SYNCABLE?



- Oxygen Free Copper
- EZ Mark Print Legend
- Descending Footmarkers
- Certifications
- Reelex Patented Boxes for Pull Performance
- Large Payout Opening
- Heavy-duty Boxes
- Round Jackets



SYNCABLE SERIES	SPEAKER CABLE		AUDIO CABLE	
	PRO-GRADE (SW-AUDPG)	PLENUM (SW-AUDPL)	STANDARD (SW-AUD)	LOW-TEMP (SW-AUDLT)
Strand Count	High	High	Regular	Regular
Fire Rating	CMG/FT4	CMP/FT6	CMG/FT4	CMG/FT4
Temp Rating	-40°C ~ 105°C	-20°C ~ 75°C	-20°C ~ 75°C	-40°C ~ 105°C
Outdoor UV Resistant	✓	✗	✗	✗
Wet Slick Jacket	✓	✗	✗	✗
EZ Strip Paper	✓	✗	✗	✗

Audio Cable

Standard – In-Wall Audio Cable



- Stranded Oxygen Free Bare Copper Conductors
- PVC Insulation
- CMG PVC FT4 Jacket
- Twisted Conductors
- -20°C to +75°C



Item Code	Description	O.D.	Voltage	Weight	Length	Ins. Colours
18 Gauge						
SW-AUD182BR-150	2c 18awg (16x30) Stranded Brown	0.212"	300	11	150m = 492ft.	BK/WH
SW-AUD182WH-150	2c 18awg (16x30) Stranded White	0.212"	300	11	150m = 492ft.	BK/WH
SW-AUD182BR-300	2c 18awg (16x30) Stranded Brown	0.212"	300	23	300m = 984ft.	BK/WH
SW-AUD182WH-300	2c 18awg (16x30) Stranded White	0.212"	300	23	300m = 984ft.	BK/WH
SW-AUD184BR-150	4c 18awg (16x30) Stranded Brown	0.244"	300	19	150m = 492ft.	BK/WH/RD/GN
SW-AUD184WH-150	4c 18awg (16x30) Stranded White	0.244"	300	19	150m = 492ft.	BK/WH/RD/GN
16 Gauge						
SW-AUD162GN-150	2c 16awg (26x30) Stranded Green	0.228"	300	15	150m = 492ft.	BK/WH
SW-AUD162BK-150	2c 16awg (26x30) Stranded Black	0.228"	300	15	150m = 492ft.	BK/WH
SW-AUD162WH-150	2c 16awg (26x30) Stranded White	0.228"	300	15	150m = 492ft.	BK/WH
SW-AUD162GN-300	2c 16awg (26x30) Stranded Green	0.228"	300	31	300m = 984ft.	BK/WH
SW-AUD162BK-300	2c 16awg (26x30) Stranded Black	0.228"	300	31	300m = 984ft.	BK/WH
SW-AUD162WH-300	2c 16awg (26x30) Stranded White	0.228"	300	31	300m = 984ft.	BK/WH
SW-AUD164GN-150	4c 16awg (26x30) Stranded Green	0.263"	300	24	150m = 492ft.	BK/WH/RD/GN
SW-AUD164BK-150	4c 16awg (26x30) Stranded Black	0.263"	300	24	150m = 492ft.	BK/WH/RD/GN
SW-AUD164WH-150	4c 16awg (26x30) Stranded White	0.263"	300	24	150m = 492ft.	BK/WH/RD/GN
SW-AUD164BK-300	4c 16awg (26x30) Stranded Black	0.263"	300	53	300m = 984ft.	BK/WH/RD/GN
SW-AUD164GN-300	4c 16awg (26x30) Stranded Green	0.263"	300	53	300m = 984ft.	BK/WH/RD/GN
SW-AUD164WH-300	4c 16awg (26x30) Stranded White	0.263"	300	53	300m = 984ft.	BK/WH/RD/GN
14 Gauge						
SW-AUD142BL-150	2c 14awg (41x30) Stranded Blue	0.276"	300	24	150m = 492ft.	BK/WH
SW-AUD142BK-150	2c 14awg (41x30) Stranded Black	0.276"	300	24	150m = 492ft.	BK/WH
SW-AUD142WH-150	2c 14awg (41x30) Stranded White	0.276"	300	24	150m = 492ft.	BK/WH
SW-AUD142BL-300	2c 14awg (41x30) Stranded Blue	0.276"	300	45	300m = 984ft.	BK/WH
SW-AUD142BK-300	2c 14awg (41x30) Stranded Black	0.276"	300	45	300m = 984ft.	BK/WH
SW-AUD144BL-75	4c 14awg (41x30) Stranded Blue	0.319"	300	21	75 m – 246 ft.	BK/WH/RD/GN
SW-AUD144WH-75	4c 14awg (41x30) Stranded White	0.319"	300	21	75 m – 246 ft.	BK/WH/RD/GN
SW-AUD144BL-150	4c 14awg (41x30) Stranded Blue	0.319"	300	41	150m = 492ft.	BK/WH/RD/GN
SW-AUD144BK-150	4c 14awg (41x30) Stranded Black	0.319"	300	41	150m = 492ft.	BK/WH/RD/GN
SW-AUD144WH-150	4c 14awg (41x30) Stranded White	0.319"	300	41	150m = 492ft.	BK/WH/RD/GN
SW-AUD144BL-300	4c 14awg (41x30) Stranded Blue	0.319"	300	74	300m = 984ft.	BK/WH/RD/GN
SW-AUD144BK-300	4c 14awg (41x30) Stranded Black	0.319"	300	74	300m = 984ft.	BK/WH/RD/GN
SW-AUD144WH-300	4c 14awg (41x30) Stranded White	0.319"	300	74	300m = 984ft.	BK/WH/RD/GN
12 Gauge						
SW-AUD122BK-75	2c 12awg (65x30) Stranded Black	0.318"	300	19	75 m – 246 ft.	BK/WH
SW-AUD122WH-75	2c 12awg (65x30) Stranded White	0.318"	300	19	75 m – 246 ft.	BK/WH
SW-AUD122YL-75	2c 12awg (65x30) Stranded Yellow	0.318"	300	19	75 m – 246 ft.	BK/WH
SW-AUD122BK-150	2c 12awg (65x30) Stranded Black	0.318"	300	34	150m = 492ft.	BK/WH
SW-AUD122WH-150	2c 12awg (65x30) Stranded White	0.318"	300	34	150m = 492ft.	BK/WH
SW-AUD122BK-300	2c 12awg (65x30) Stranded Black	0.318"	300	73	300m = 984ft.	BK/WH
SW-AUD124BK-150	4c 12awg (65x30) Stranded Black	0.370"	300	57	150m = 492ft.	BK/WH/RD/GN

Speaker Cable

Pro-Grade – In-Wall Speaker Cable



- Stranded Oxygen Free Bare Copper Conductors
- High Strand Count
- PVC Insulation
- CMG PVC FT4 Jacket
- Twisted Conductors
- -40°C to +105°C



Item Code	Description	O.D.	Voltage	Weight	Length	Ins. Colours
16 Gauge						
SW-AUD162BK-150PG	2c 16AWG (65x34) Stranded BC Black	 0.236"	300	16	150m = 492ft.	BK/RD
SW-AUD162WH-150PG	2c 16AWG (65x34) Stranded BC White	 0.236"	300	16	150m = 492ft.	BK/RD
SW-AUD162BK-300PG	2c 16AWG (65x34) Stranded BC Black	 0.236"	300	32	300m = 984ft.	BK/RD
SW-AUD162WH-300PG	2c 16AWG (65x34) Stranded BC White	 0.236"	300	32	300m = 984ft.	BK/RD
SW-AUD164BK-150PG	4c 16AWG (65x34) Stranded BC Black	 0.276"	300	25	150m = 492ft.	BK/RD/WH/GN
SW-AUD164WH-150PG	4c 16AWG (65x34) Stranded BC White	 0.276"	300	25	150m = 492ft.	BK/RD/WH/GN
SW-AUD164BK-300PG	4c 16AWG (65x34) Stranded BC Black	 0.276"	300	54	300m = 984ft.	BK/RD/WH/GN
SW-AUD164WH-300PG	4c 16AWG (65x34) Stranded BC White	 0.276"	300	54	300m = 984ft.	BK/RD/WH/GN

14 Gauge

SW-AUD142BK-150PG	2c 14AWG (105x34) Stranded BC Black	 0.280"	300	25	150m = 492ft.	BK/RD
SW-AUD142WH-150PG	2c 14AWG (105x34) Stranded BC White	 0.280"	300	25	150m = 492ft.	BK/RD
SW-AUD142BK-300PG	2c 14AWG (105x34) Stranded BC Black	 0.280"	300	46	300m = 984ft.	BK/RD
SW-AUD142WH-300PG	2c 14AWG (105x34) Stranded BC White	 0.280"	300	46	300m = 984ft.	BK/RD
SW-AUD144BK-150PG	4c 14AWG (105x34) Stranded BC Black	 0.331"	300	42	150m = 492ft.	BK/RD/WH/GN
SW-AUD144WH-150PG	4c 14AWG (105x34) Stranded BC White	 0.331"	300	42	150m = 492ft.	BK/RD/WH/GN
SW-AUD144BK-300PG	4c 14AWG (105x34) Stranded BC Black	 0.331"	300	75	300m = 984ft.	BK/RD/WH/GN
SW-AUD144WH-300PG	4c 14AWG (105x34) Stranded BC White	 0.331"	300	75	300m = 984ft.	BK/RD/WH/GN

Plenum (FT-6) – In-Wall Speaker Cable



- Stranded Oxygen Free Bare Copper Conductors
- High Strand Count
- PVC Insulation
- CMP PVC FT6 Jacket
- Twisted Conductors
- -20°C to +75°C



Item Code	Description	O.D.	Voltage	Weight	Length	Ins. Colours
16 Gauge						
SW-AUD162BK-300PL	2c 16AWG (65x34) Stranded BC Black	 0.177"	300	31	300m = 984ft.	BK/RD
SW-AUD162WH-300PL	2c 16AWG (65x34) Stranded BC White	 0.177"	300	31	300m = 984ft.	BK/RD
SW-AUD164BK-300PL	4c 16AWG (65x34) Stranded BC Black	 0.220"	300	53	300m = 984ft.	BK/RD/WH/GN
SW-AUD164WH-300PL	4c 16AWG (65x34) Stranded BC White	 0.220"	300	53	300m = 984ft.	BK/RD/WH/GN
14 Gauge						
SW-AUD142BK-300PL	2c 14AWG (105x34) Stranded BC Black	 0.213"	300	45	300m = 984ft.	BK/RD
SW-AUD142WH-300PL	2c 14AWG (105x34) Stranded BC White	 0.213"	300	45	300m = 984ft.	BK/RD
SW-AUD144BK-300PL	4c 14AWG (105x34) Stranded BC Black	 0.268"	300	74	300m = 984ft.	BK/RD/WH/GN
SW-AUD144WH-300PL	4c 14AWG (105x34) Stranded BC White	 0.268"	300	74	300m = 984ft.	BK/RD/WH/GN

Audio Cable

Low Temp – In-Wall Audio Cable



- Stranded Oxygen Free Bare Copper Conductors
- PVC Insulation
- CMG PVC FT4 Jacket
- Twisted Conductors
- **-40°C to +105°C**



Item Code	Description	O.D.	Voltage	Weight	Length	Ins. Colours
16 Gauge						
SW-AUD162GN-150LT	2c 16awg (26x30) Stranded Green 	0.228"	300	15	150m = 492ft.	BK/WH
SW-AUD162WH-150LT	2c 16awg (26x30) Stranded White 	0.228"	300	15	150m = 492ft.	BK/WH
SW-AUD162GN-300LT	2c 16awg (26x30) Stranded Green 	0.228"	300	31	300m = 984ft.	BK/WH
SW-AUD162WH-300LT	2c 16awg (26x30) Stranded White 	0.228"	300	31	300m = 984ft.	BK/WH
SW-AUD164GN-150LT	4c 16awg (26x30) Stranded Green 	0.263"	300	27	150m = 492ft.	BK/WH/RD/GN
SW-AUD164WH-150LT	4c 16awg (26x30) Stranded White 	0.263"	300	27	150m = 492ft.	BK/WH/RD/GN
14 Gauge						
SW-AUD142BL-150LT	2c 14awg (41x30) Stranded Blue 	0.276"	300	24	150m = 492ft.	BK/WH
SW-AUD142WH-150LT	2c 14awg (41x30) Stranded White 	0.276"	300	24	150m = 492ft.	BK/WH
SW-AUD144WH-150LT	4c 14awg (41x30) Stranded White 	0.319"	300	41	150m = 492ft.	BK/WH/RD/GN

Network Cable

Cat-6 550MHz 23-4pr FT-4 150 Meter Pull Box



- 23 AWG solid bare copper conductors, twisted pairs
- Polyolefin insulation – ripcord
- CMR PVC FT-4 jacket
- -20°C + 75°C
- ETL verified
- Available in **blue or white**

Item Code	O.D.	Weight	Length
SW-CAT6-150M-BL	0.235"	18	150m = 492ft.
SW-CAT6-150M-WH	0.235"	18	150m = 492ft.

3x Cat-6 550MHz 23-4pr FT-4 150 Meter Reel



- 3x 23 AWG solid bare copper conductors, twisted pairs
- PVC Jacket – 1) Blue, 2) Grey, 3) Yellow
- Polyolefin insulation – ripcord
- CMR PVC FT-4 jacket
- -20°C + 75°C
- ETL verified
- Available in **blue**

Item Code	O.D.	Weight	Length
SW-CAT6X3	0.570"	77	150m = 492ft.

Coaxial Cable

Cat-5e 350MHz 24-4pr FT-4 150 Meter Pull Box



- 24 AWG solid bare copper conductors, twisted pairs
- Polyolefin insulation – ripcord
- CMR PVC FT-4 jacket
- -20°C + 75°C
- ETL verified
- Available in **blue or white**

Item Code	O.D.	Weight	Length
SW-CAT5E-150M-BL	0.200"	14	150m = 492ft.
SW-CAT5E-150M-WH	0.200"	14	150m = 492ft.

RG6 CATV FT-4 Cable 150 Meter Pull Box




- 18 AWG solid CCS conductor
- Dual shield 60% aluminum braid with 100% aluminum foil
- CMG PVC FT-4 jacket
- Swept to 3000MHz
- -20°C + 75°C
- ETL verified
- Available in **black or white**

Item Code	O.D.	Weight	Length
SW-RG6BK-150M	0.270"	25	150m = 492ft.
SW-RG6WH-150M	0.270"	25	150m = 492ft.

Ethernet Patch Cables

Bare Copper 24AWG Conductor, UTP, Unshielded, PVC Jacket, ETL, cUL, FT-4 rated

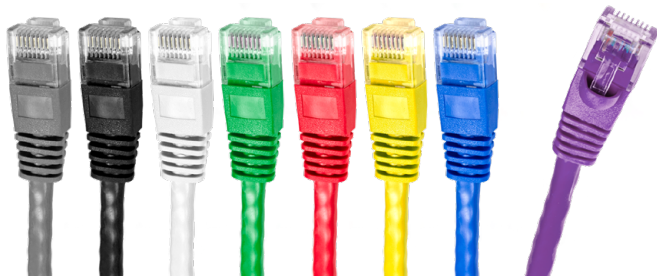

CAT-5E

Length	Item Code
1'	SW-CAT5E-1FT-BK
	SW-CAT5E-1FT-BL
	SW-CAT5E-1FT-GN
	SW-CAT5E-1FT-GY
	SW-CAT5E-1FT-RD
2'	SW-CAT5E-1FT-WH
	SW-CAT5E-1FT-YL
	SW-CAT5E-2FT-BK
	SW-CAT5E-2FT-BL
	SW-CAT5E-2FT-GN
3'	SW-CAT5E-2FT-GY
	SW-CAT5E-2FT-RD
	SW-CAT5E-2FT-WH
	SW-CAT5E-2FT-YL
	SW-CAT5E-3FT-BK
5'	SW-CAT5E-3FT-BL
	SW-CAT5E-3FT-GN
	SW-CAT5E-3FT-GY
	SW-CAT5E-3FT-RD
	SW-CAT5E-3FT-WH
7'	SW-CAT5E-3FT-YL
	SW-CAT5E-5FT-BK
	SW-CAT5E-5FT-BL
	SW-CAT5E-5FT-GN
	SW-CAT5E-5FT-RD
10'	SW-CAT5E-5FT-WH
	SW-CAT5E-5FT-YL
	SW-CAT5E-7FT-BK
	SW-CAT5E-7FT-BL
	SW-CAT5E-7FT-GN
15'	SW-CAT5E-7FT-WH
	SW-CAT5E-7FT-YL
	SW-CAT5E-10FT-BK
	SW-CAT5E-10FT-BL
	SW-CAT5E-10FT-GN
25'	SW-CAT5E-10FT-WH
	SW-CAT5E-10FT-YL
	SW-CAT5E-15FT-BK
	SW-CAT5E-15FT-BL
	SW-CAT5E-15FT-WH
35'	SW-CAT5E-15FT-YL
	SW-CAT5E-25FT-BK
	SW-CAT5E-25FT-BL
	SW-CAT5E-25FT-WH
	SW-CAT5E-35FT-BK
50'	SW-CAT5E-35FT-BL
	SW-CAT5E-35FT-WH
	SW-CAT5E-50FT-BK
	SW-CAT5E-50FT-BL
	SW-CAT5E-50FT-WH

CAT-6

Length	Item Code
1'	SW-CAT6-1FT-BK
	SW-CAT6-1FT-BL
	SW-CAT6-1FT-GN
	SW-CAT6-1FT-GY
	SW-CAT6-1FT-RD
2'	SW-CAT6-1FT-VL
	SW-CAT6-1FT-WH
	SW-CAT6-1FT-YL
	SW-CAT6-2FT-BK
	SW-CAT6-2FT-BL
3'	SW-CAT6-2FT-GN
	SW-CAT6-2FT-GY
	SW-CAT6-2FT-RD
	SW-CAT6-2FT-VL
	SW-CAT6-2FT-WH
5'	SW-CAT6-2FT-YL
	SW-CAT6-3FT-BK
	SW-CAT6-3FT-BL
	SW-CAT6-3FT-GN
	SW-CAT6-3FT-GY
7'	SW-CAT6-3FT-RD
	SW-CAT6-3FT-VL
	SW-CAT6-3FT-WH
	SW-CAT6-3FT-YL
	SW-CAT6-5FT-BK
10'	SW-CAT6-5FT-BL
	SW-CAT6-5FT-GN
	SW-CAT6-5FT-RD
	SW-CAT6-5FT-WH
	SW-CAT6-5FT-YL
15'	SW-CAT6-7FT-BK
	SW-CAT6-7FT-BL
	SW-CAT6-7FT-GN
	SW-CAT6-7FT-VL
	SW-CAT6-7FT-WH
25'	SW-CAT6-7FT-YL
	SW-CAT6-10FT-BK
	SW-CAT6-10FT-BL
	SW-CAT6-10FT-WH
	SW-CAT6-15FT-BK
35'	SW-CAT6-15FT-BL
	SW-CAT6-15FT-WH
	SW-CAT6-25FT-BK
	SW-CAT6-25FT-BL
	SW-CAT6-25FT-WH
50'	SW-CAT6-25FT-YL
	SW-CAT6-35FT-BK
	SW-CAT6-35FT-BL
	SW-CAT6-50FT-BK
	SW-CAT6-50FT-BL

10Gb/s Cat-6A Bare Copper 28AWG Conductor, UTP, Unshielded, PVC Jacket, ETL, cUL, FT-4 rated



CAT-6A Super Slim

Length	Item Code
0.5'	SW-CAT6A-S-0-5BK
	SW-CAT6A-S-0-5BL
	SW-CAT6A-S-0-5GN
	SW-CAT6A-S-0-5VL
	SW-CAT6A-S-0-5WH
0.9'	SW-CAT6A-S-0-5YL
	SW-CAT6A-S-0-9BK
	SW-CAT6A-S-0-9BL
	SW-CAT6A-S-0-9WH
	SW-CAT6A-S-1BK
1'	SW-CAT6A-S-1BL
	SW-CAT6A-S-1GN
	SW-CAT6A-S-1VL
	SW-CAT6A-S-1WH
	SW-CAT6A-S-1YL
2'	SW-CAT6A-S-2BK
	SW-CAT6A-S-2BL
	SW-CAT6A-S-2GN
	SW-CAT6A-S-2VL
	SW-CAT6A-S-2WH
3'	SW-CAT6A-S-2YL
	SW-CAT6A-S-3BK
	SW-CAT6A-S-3BL
	SW-CAT6A-S-3GN
	SW-CAT6A-S-3VL
5'	SW-CAT6A-S-3WH
	SW-CAT6A-S-3YL
	SW-CAT6A-S-5BK
	SW-CAT6A-S-5BL
	SW-CAT6A-S-5GN
6'	SW-CAT6A-S-5WH
	SW-CAT6A-S-5YL
	SW-CAT6A-S-6BK
	SW-CAT6A-S-6BL
	SW-CAT6A-S-6GN
7'	SW-CAT6A-S-6WH
	SW-CAT6A-S-6YL
	SW-CAT6A-S-7BK
	SW-CAT6A-S-7BL
	SW-CAT6A-S-7GN
10'	SW-CAT6A-S-7VL
	SW-CAT6A-S-7WH
	SW-CAT6A-S-7YL
	SW-CAT6A-S-10BK
	SW-CAT6A-S-10GY
15'	SW-CAT6A-S-15BK
	SW-CAT6A-S-15GY
	SW-CAT6A-S-25BK
	SW-CAT6A-S-25BL
	SW-CAT6A-S-50BK

JACKET COLOUR CODE: **BK** BLACK **BL** BLUE **GN** GREEN **GY** GREY **RD** RED **VL** VIOLET **WH** WHITE **YL** YELLOW

CAT-6A Rack-Mount Super Slim

10Gb/s Cat6A Rack-Mount
Super Slim Ethernet Patch Cables



Length	Item Code
0.5'	SW-CAT6A-RM-0-5BK
	SW-CAT6A-RM-0-5BL
	SW-CAT6A-RM-0-5WH
1'	SW-CAT6A-RM-1BK
	SW-CAT6A-RM-1BL
	SW-CAT6A-RM-1WH

Patch Panels

- 1U (24 Ports) /2U (48 Ports) patch panels have RJ45 female ports on the front and 110 punch-down style terminals on the rear
- A colour-coded label on the back offers both EIA/TIA 568A & 568B Wiring Instructions
- Ports are numbered both on the front and back

Cat5E 24/48 Port Patch Panel 110 Style



SC-PA24-110



SC-PA48-110

Cat6 12/24/48 Port Patch Panel 110 Style



SC-PA12C6-110



SC-PA24C6-110



SC-PA48C6-110

Cat6A 12 Port Patch Panel 110 Style



SC-PA12C6A-110

Cat6A 24 Port Shielded Patch Panel 110 Style



SC-PA24C6A-110

24-Port 1U & 48-Port 2U Blank Keystone Patch Panel with Cable Management



SC-PA24CM-1U



SC-PA48CM-2U

24-Port 1U & 48-Port 2U Blank Keystone Patch Panel



SC-PA24-1U



SC-PA48-2U

Snap-In Keystones

CAT-5E 90-Degree

UTP 90-Degree. T568A/B, 110 IDC



BULK PACK

CAT-5E
25/PACK



SC-CAT5J-RD
(Red)



SC-CAT5J-YL
(Yellow)



SC-CAT5J-GN
(Green)



SC-CAT5J-BL
(Blue)



SC-CAT5J
(White)



SC-CAT5J-BK
(Black)



SC-CAT5J-25
(White)

SC-CAT5J-BL-25
(Blue)

CAT-6 90-Degree

UTP 90-Degree. T568A/B, 110 IDC



BULK PACK

CAT-6
25/PACK



SC-CAT6J-RD
(Red)




SC-CAT6J-VL
(Violet)



SC-CAT6J-YL
(Yellow)



SC-CAT6J-GN
(Green)

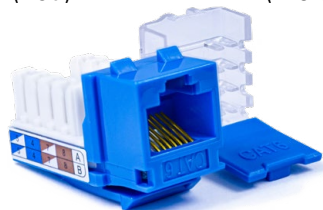

SC-CAT6J-BL
(Blue)



SC-CAT6J
(White)



SC-CAT6J-BK
(Black)



SC-CAT6J-25
(White)

SC-CAT6J-BL-25
(Blue)

CAT-6 180-Degree

CAT6, UTP 180-Degree.
T568A/B, 110 IDC.



CAT-6A Tool-Free

Cat-6A UTP 180-Degree.
T568A/B



SC-CAT6 (White) / SC-CAT6-BL (Blue) / SC-CAT6-BK (Black)



SC-CAT6A (White)



SC-CAT6A-BL (Blue)

Snap-In Keystones

CAT-6A 180-Degree




Cat-6A UTP 180-Degree.
Punch Down T568A/B, 110 IDC.
SC-CAT6A-PD (White)
SC-CAT6A-BL-PD (Blue)



Cat-6A STP 180-Degree.
Punch Down T568A/B, 110 IDC.
SC-CAT6A-SH-110 (White)

CAT-6A Tool-Free



Cat-6A STP 180-Degree.
T568A/B, 110 IDC.
SC-CAT6A-SH (Silver)



Speaker Binding Post
SC-KBP-R (Red)
SC-KBP-BK (Black)



RCA Bulkhead
SC-KRCA-W (White)
SC-KRCA-R (Red)



RCA to "F" Bulkhead
SC-KRF-FF-W (White)
SC-KRF-FF-R (Red)



F81 3GHz Connector
SC-KFF-3GHZ



3.5mm Stereo Insert
SC-K35S



Blank Insert
SC-KBK (White)
SC-KBK-BK (Black)



F81 Connector
SC-KFF (White)
SC-KFF-BK (Black)

BULK PACK

F-81

25/PACK



HDMI Coupler
SC-KHDMI (White)
SC-KHDMI-BK (Black)



Cat 6 Coupler
SC-KCAT6C



F81 Connector
SC-KFF-25 (White)

Waterproof Coupler



10G Rated Waterproof
RJ45 Splice Coupler for STP/UTP Cables
SC-WPRJ45



10G Rated Waterproof
RJ45 Panel Mount Coupler for STP/UTP Cables
SC-WPRJ45PM



**Wall Plate 1 Port
Insert and Plate. 2-Pieces**
SC-DJ1 (White)
SC-DJ1-BK (Black)



**Wall Plate 2 Ports
Insert and Plate. 2-Pieces**
SC-DJ2 (White)
SC-DJ2-BK (Black)

BULK PACK 25/BOX



**Wall Plate 3 Ports
Insert and Plate. 2-Pieces**
SC-DJ3 (White)



**Wall Plate 4 Ports
Insert and Plate. 2-Pieces**
SC-DJ4 (White)
SC-DJ4-BK (Black)



**Wall Plate 1 Port
Insert and Plate. 2-Pieces**
SC-DJ1-25



**Wall Plate 2 Ports
Insert and Plate. 2-Pieces**
SC-DJ2-25



**Wall Plate 6 Ports
Insert and Plate. 2-Pieces**
SC-DJ6 (White)



Wall Plate Blank Insert
SC-DJX (White)
SC-DJX-BK (Black)




Blank Wall Plate
SC-2XWH (White)
SC-2XBK (Black)



Single 8K HDMI Insert
SC-HDMI8K-IN



Screwless Wall Plate 1 Gang / 2 Gang
SC-DSLWP1 (White) / SC-DSLWP2 (White)

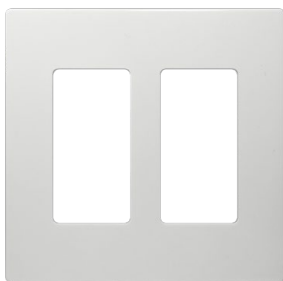

Wall Plate 1 Gang / 2 Gang
SC-DWP1 (White) / SC-DWP2 (White)



Decora Style Wall Plates



Single Brush Decora Wall Plate Insert and Plate with Drywall Clips. 2-Pieces
SC-224LV (White)



Single Brush Decora Wall Plate Insert and Plate. 2-Pieces
SC-224 (White)
SC-224-BK (Black)



Dual Brush Decora Wall Plate Insert and Plate. 2-Pieces
SC-225 (White)
SC-225-BK (Black)



Flush Mount Decora Wall Jack 4 Pin
SC-PH127-4-1



Combo Decora Wall Plate Tele Jack & Gold-plated F81
SC-WCP8WG



Coaxial Decora Wall Plate Gold-plated F81
SC-WCP6WG



Coaxial Decora Wall Plate F81
SC-WCP6WH



1 Gang Flush to Inner Surface Bulk Wire
SC-WCP220 (White) SC-WCP220BK (Black)



Double Gang Flush to Inner Surface Bulk Wire
SC-WCP221



1 Gang Flush to Outer Surface Bulk Wire
SC-WCP222

Surface Mount Boxes



Modular Telecom Surface Jack
SC-PH119-4-1



Single Surface Mount Box for Keystone Jacks
SC-501



Dual Surface Mount Box for Keystone Jacks
SC-502



Junction Box
SC-PH131W

Contractor Series – Snap-In Keystones

Cat 5e Keystone Jacks **10/BAG**



SC-CAT5J-CS-10 (White)
SC-CAT5J-BL-CS-10 (Blue)
SC-CAT5J-BK-CS-10 (Black)

Cat 6 Keystone Jacks **10/BAG**



SC-CAT6J-CS-10 (White)
SC-CAT6J-BL-CS-10 (Blue)
SC-CAT6J-BK-CS-10 (Black)

Decora Style Inserts **10/BAG**



1 Port Decora Insert Plate
SC-IP1-CS-10



2 Port Decora Insert Plate
SC-IP2-CS-10



3 Port Decora Insert Plate
SC-IP3-CS-10



4 Port Decora Insert Plate
SC-IP4-CS-10

Decora Style Wall Plates **10/BOX**

1 Port



SC-DJ1-CS-10 (White)
SC-DJ1-BK-CS-10 (Black)

2 Port



SC-DJ2-CS-10 (White)
SC-DJ2-BK-CS-10 (Black)

3 Port



SC-DJ3-CS-10 (White)

4 Port



SC-DJ4-CS-10 (White)

6 Port



SC-DJ6-CS-10 (White)

Coupler Inserts

10/BAG



Single Gang Decora Plate
SC-DWP-CS-10 (White)


10/BAG



F81 Coupler
SC-KFF-CS-10



HDMI Coupler
SC-KHDMI-CS

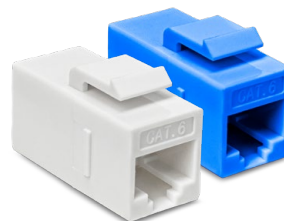

Cat 6 Coupler
SC-KCAT6C-CS
SC-KCAT6C-CS-BL

* Contractor Series contains no ETL, UL or CSA Certification.

Connectors

F-Type Connectors

50/JAR


F-Type RG6U Crimp-On
Connector Male
SC-F56AL-1



F-Type Snap Lock
Connector for RG6U
SC-F56SNS-1



F-Type Snap Lock Connector
for QUAD Shield RG6U
SC-F56QSNS-1



F-Type Twist On
Connector for RG6U
SC-F56TW-1



Female Splice
with Nut & Washer
SC-F81NW



Female Splice
with Nut & Washer **2.4GHz**
SC-F81NW-2-4GHZ

BNC Connector

10/PACK


BNC Compression
for RG6U
SC-RG6BNC-C

RCA Connector

10/PACK


RCA Compression
for RG6U
SC-RG6RCA-C

Pass Through RJ45 Connectors **100/JAR**



PassThrough
RJ45 **Cat-5E** Crimp Plugs
SC-RJ45PT



PassThrough
RJ45 **Cat-6** Crimp Plugs
SC-RJ45C6PT

Steel Cable Clamps **100/JAR**



for Telephone Wire
SC-CC1



for RG6 & RG59
SC-CC2

Modular Data Connectors **100/JAR**



Modular Plug for
Round Cable 4P4C
SC-PH114-4R



Modular Plug for
Round Cable 6P6C
SC-PH114-6R



Modular Plug for
Round Cable 6P8C
SC-PH114-8R



Modular Plug for **Cat-5E**
Round **Stranded** 8P8C
SC-PH114L5-8R



Modular Plug for
Cat-5E Round
Solid 8P8C
SC-PH114L5-8RS



Modular Plug for
Cat-5E Round
Solid **Shield** 8P8C
SC-PH114L5-8RS-SH



Modular Plug for
Cat-6 Round
Solid 8P8C – 2-Pieces
SC-PH114L6-8RS

Banana Connector



12 to 24 AWG
Snap Connectors
10 RED + 10 BLACK
SC-BPSL-20

Accessories

Headlamp



SC-HL

Hook & Loop Fasteners

20mm x 10m – 1 Roll



SC-HL20-WH (White) / SC-HL20-BK (Black)

Bridle Rings

1/4-20 x 1"

10/BOX



SC-BR1-25

Electrical Tapes



SC-PVC66-WH (White)
SC-PVC66-BK (Black)

12 Slot Terminal Strip

10/PACK



SC-TS12

B Wire Crimp Connector 100/JAR



for 19-26 AWG
SC-T875L-100

Gel-Filled



for 19-26 AWG (Gel-Filled)
SC-T876-100

Corrugated Flexible Conduit

Pull Tape Included



1 1/4"
100 FT
30.48 m

1 1/2"
100 FT
30.48 m


2"
100 FT
30.48 m

SC-FC1-25-100-V2 SC-FC1-50-100-V2 SC-FC2-00-100-V2

- Manufactured from flexible PP
- Rugged corrugated design is flexible and light weight, yet provides excellent crush resistance
- Outstanding long term cable protection from shifting ground, rock and root impingement
- Provides a permanent pathway, simplifies future cable repairs or replacement
- FOOTAGE MARKINGS: Sequential foot or meter markings.
- Available in Riser for behind the wall applications
- Installation Applications: Existing Conduit, Direct Burial, Aerial, Indoor, Short Runs
- Market Applications: Telecom, CATV, Enterprise, C&I, Energy, DOT

Standard J Hooks

- **EASY INSTALLATION:**
Quick and simple cable
retainer clip.
- **HIGH-QUALITY
GALVANIZED STEEL:**
Zinc-coated for superior
corrosion resistance.
- **CABLE PROTECTION:**
Designed with correct cable
bend radius to prevent
pinching, kinking, or damage.
- **FLEXIBILITY AND
ADAPTABILITY:**
Allows easy cable routing off
the ground.

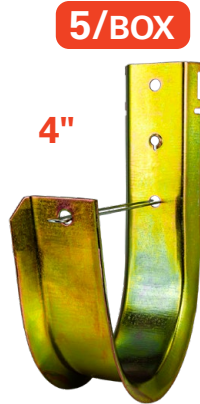

SC-JH64-5



SC-JH32-10



SC-JH21-10



SC-JH12-10

Single Gang Low Voltage Toolless Mounting Plate



SC-WCP7-MPP

Single Gang Low Voltage Mounting Bracket with Screws



SC-WCP7-LVS1

Single Gang Low Voltage Mounting Bracket for Existing Construction



SC-WCP7-LV1

Dual Gang Low Voltage Mounting Bracket for Existing Construction




SC-WCP7-LV2

Single Gang Retrofit Metal Wall Plate Adaptor



SC-WCP7MPL

Metal Low Voltage Single Gang Mounting Plate



SC-WCP7MP1

Tools

Keystone Jack Termination Tool*

Terminate both Cat-5E and Cat-6 Keystone jacks and cut all excess wires in one step.



*90-degree jack only

SC-TERM1

Pass through RJ45 Termination Tool

Works with both Cat-5E and Cat-6 RJ45 Crimp Plugs



SC-TERM2

Termination Tool for Contractor Series Keystone Jacks

Works with Contractor Series Keystone Only



SC-TERM3

Termination Tool for CAT6A Punch-down Keystone Jacks

Works with SC-CAT6A-PD (White)
SC-CAT6A-BL-PD (Blue)
Keystone Only



SC-TERM4

Compact Folding Drywall Saw with Locking Blade



SC-DSAW-1

6-in-1 Ratcheting Screwdriver with Integrated Bit Storage



SC-SD10

Cutter/Stripper with Slot Control



SC-STR1

Universal Stripping Tool



SC-STR20

Automatic Self-Adjusting Wire Stripper



SC-STR30

5" Precision Flush Cutter with Angled Jaw



SC-CUT05

Crimping Tool

for BNC & F Connectors



SC-CTR4

Compression Tool

for BNC, F & RCA Connectors



SC-CTR9

IR Repeater

USB Powered Wireless IR Repeater Dongle



SC-IR-STH550

- Can work both as IR repeater and wireless IR extender
- Radio frequency (RF): 915MHz
- RF operating distance: up to 100 meters line of sight.
- IR carrier frequency: 20KHz – 60KHz
- Compliant with CE/FCC EMC regulation
- High IR sensitivity (-90dBm).
- Bi-directional full band IR control
- Channel pairing.

2 Port IR Repeater Kit



SC-IR-STH700

The 2-Port IR repeater kit extends the distance of the IR remote controls allowing to control up to 2 IR-equipped components

Includes

- 1 x 2-port IR hub
- 1 x IR receiver
- 2 x IR emitters
- 1 x 12V DC 500mA adapter

4 Port IR Repeater Kit



SC-IR-STH600V2

The 4-port IR repeater kit extends the distance of the IR remote controls allowing to control up to 4 IR-equipped components

Includes

- 1 x 4-port IR Hub
- 1 x IR receiver
- 2 x dual-head IR emitters
- 1 x 5V DC 1.0A adapter

6 Port IR Repeater Kit



SC-IR-STH800

The 6-Port IR repeater kit extends the distance of the IR remote controls allowing to control up to 6 IR-equipped components.

Includes

- 1 x 6-port IR hub
- 1 x IR receiver
- 2 x dual-head IR emitters
- 1 x 12V DC 500mA adapter



Cable Ties

4" Cable Ties **100/PACK**  LISTED



Black
UV-resistant
SC-TW4BK

Natural
SC-TW4

- Polyamide 6.6, UL94V-2, **18LB** tensile strength
- Length: 100mm (4"), Width: 2.5mm (0.1")
- Max. bundle Ø: 22mm(0.87")
- -40°C + 85°C
- c(UL) Verified

5" Cable Ties **100/PACK**  LISTED



Black
UV-resistant
SC-TW5BK

Natural
SC-TW5

- Polyamide 6.6, UL94V-2, **18LB** tensile strength
- Length: 140mm (5.5"), Width: 2.5mm (0.1")
- Max. bundle Ø: 33mm(1.3")
- -40°C + 85°C
- c(UL) Verified

8" Cable Ties **100/PACK**  LISTED



Black
UV-resistant
SC-TW8BK

Natural
SC-TW8

- Polyamide 6.6, UL94V-2, **50LB** tensile strength
- Length: 200mm (8"), Width: 4.8mm (0.19")
- Max. bundle Ø: 50mm(1.97")
- -40°C + 85°C
- c(UL) Verified

8" Cable Ties **1,000/PACK**  LISTED



Black
UV-resistant
SC-TW8BK-1000

Natural
SC-TW8-1000

Cable Ties

11" Cable Ties **100/PACK**



Black
UV-resistant
SC-TW11BK

Natural
SC-TW11

- Polyamide 6.6, UL94V-2, **50LB** tensile strength
- Length: 280mm (11"), Width: 4.8mm (0.19")
- Max. bundle Ø: 22mm(0.87")
- -40°C + 85°C
- c(UL) Verified

15" Cable Ties **100/PACK**



Black
UV-resistant
SC-TW15BK

Natural
SC-TW15

- Polyamide 6.6, UL94V-2, **50LB** tensile strength
- Length: 370mm (14.5"), Width: 7.6mm (0.3")
- Max. bundle Ø: 102mm(4")
- -40°C + 85°C
- UL Recognized Component

5" Mounting Cable Ties **100/PACK**



Black
UV-resistant
SC-TWO5BK

Natural
SC-TWO5

- Polyamide 6.6, UL94V-2, **40LB** tensile strength
- Built-in Mounting Hole Ø: 4.2mm(0.17")
- Length: 150mm (5.91"), Width: 3.6mm (0.14")
- Max. bundle Ø: 32mm(1.26")
- -40°C + 85°C

8" Mounting Cable Ties **100/PACK**



Black
UV-resistant
SC-TWO8BK

Natural
SC-TWO8

- Polyamide 6.6, UL94V-2, **50LB** tensile strength
- Built-in Mounting Hole Ø: 5.2mm(0.20")
- Length: 200mm (7.87"), Width: 4.8mm (0.19")
- Max. bundle Ø: 47mm(1.85")
- -40°C + 85°C
- UL Recognized Component

15" Mounting Cable Ties



Natural SC-TWO15

- Polyamide 6.6, UL94V-2, **50LB** tensile strength
- Built-in Mounting Hole Ø: 5.2mm(0.20")
- Length: 380mm (14.96"), Width: 4.8mm (0.19")
- Max. bundle Ø: 102mm(4.02")
- -40°C + 85°C
- UL Recognized Component

8" Low Temp Cable Ties



Black UV-resistant SC-TW8LT

- Polyamide 6.6, UL94HB, **40LB** tensile strength
- Length: 200mm (8"), Width: 3.6mm(1.14")
- Max. bundle Ø: 53mm (2.09")
- -60°C + 85°C
- UV-resistant

Cable Cradle Mounts for Cable Tie



Natural SC-CCM3

- **Mounting Hole Ø: 3.7mm(0.15")**
- Polyamide 6.6, UL94V-2,
- L x W x H: 0.59" x 0.37" x 0.28" 14.9mm x 9.5mm x 7.2mm
- Max. Tie Width: 4.8mm (0.19")
- -40°C + 85°C



Natural SC-CCM6

- **Mounting Hole Ø: 6.4mm(0.25")**
- Polyamide 6.6, UL94V-2,
- L x W x H: 0.86" x 0.63" x 0.38" 21.9mm x 15.9mm x 9.7mm
- Max. Tie Width: 9.0mm (0.35")
- -40°C + 85°C

Self-Adhesive Cable Cradle Mounts for Cable Ties **100/PACK**

3/4" x 3/4" Mounting Base



Black SC-TWA1BK

- Polyamide 6.6, UL94V-2
- Length: 19mm (0.75"), Width: 19mm (0.75")
- Mounting Hole Ø: 3.5mm(0.14")



Natural SC-TWA1

- Max. Tie Width: 4mm (0.16")
- -40°C + 85°C

1 1/8" x 1 1/8" Mounting Base



Black SC-TWA2BK

- Polyamide 6.6, UL94V-2
- Length: 27.8mm (1.09"), Width: 27.8mm (1.09")
- Mounting Hole Ø: 5.7mm(0.22")

Natural SC-TWA2

- Max. Tie Width: 5.3mm (0.21")
- -40°C + 85°C

Wire Connectors **100/PACK**

Closed-End Crimp Solderless Terminals

- Compact design fits easily into tight locations
- Flared skirt ensures easy wire entry and protects against turned-back strands
- UL Listed for 300V maximum building wiring; temperature rated at 105°C
- UL approved 94V-2 Polyamide 6,6 Plastic body with copper tube



22-16 AWG
SC-T879

22-14 AWG
SC-T880

22-10 AWG
SC-T881

Twist-On Wire Connectors **100/PACK**

- Five colour-coded models cover a full range of wire sizes from 22-10 AWG
- No pre-twisting required - positive grip design provides fast, easy installation that will not relax over time
- Tough, UL94V-2 flame-retardant shell rated at 105°C
- UL Listed to 486C and comply with Federal Specification W-S-610E
- Material: UL approved PP, steel spring



22-18 AWG
300V Rating
SC-T929

22-14 AWG
300V Rating
SC-T930

22-14 AWG
600V Rating
SC-T931

18-10 AWG
600V Rating
SC-T933

22-10 AWG
600V Rating
SC-T935




Fiber Optic Patch Cord

OM3 Duplex LC/LC(UPC)

50/125 μ m ϕ 2.0mm PVC Aqua

- Insertion Loss Spec
- Tested By (JDSURM 3950@850 and 1310nm)
- Multimode: UPC(IL $\leq$ 0.3dB)

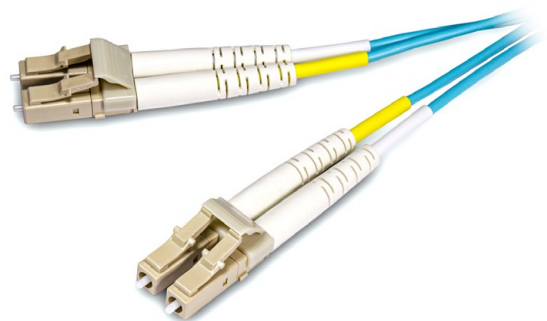

1M

SF-LCLCOM3-1M

3M

SF-LCLCOM3-3M

5M

SF-LCLCOM3-5M


7M

SF-LCLCOM3-7M

SM Duplex LC/LC(UPC)

9/125 μ m ϕ 2.0mm PVC Yellow

- Insertion Loss Spec
- Singlemode: UPC(IL $\leq$ 0.3dB) PC(RL $\geq$ 50dB)
- Tested By (JDSURM 3750@1310 and 1550nm)

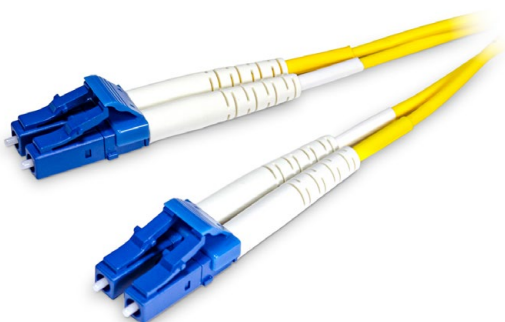

1M

SF-LCLCSM-1M

3M

SF-LCLCSM-3M

7M

SF-LCLCSM-7M


10M

SF-LCLCSM-10M

SM Duplex LC/SC(UPC)

9/125 μ m ϕ 2.0mm PVC Yellow

- Insertion Loss Spec
- Singlemode: UPC(IL $\leq$ 0.3dB) PC(RL $\geq$ 50dB)
- Tested By (JDSURM 3750@1310 and 1550nm)

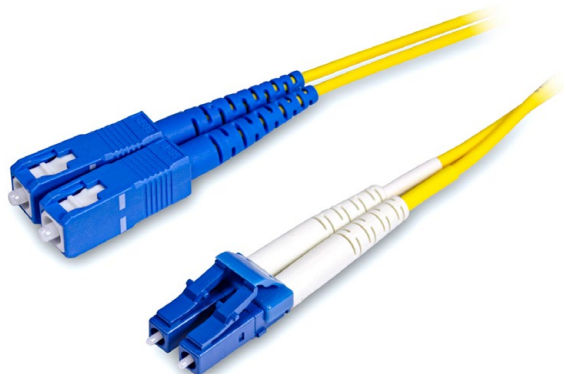

1M

SF-LCSCSM-1M

3M

SF-LCSCSM-3M

Fiber Optic Adapter Plates

Blank Panel



SF-AP-BLANK-BLK

12F Single Mode SC Duplex Adapter Plate (Blue)



SF-AP-SMD-SC-12F

12F Single Mode LC Duplex Adapter Plate (Blue)



SF-AP-SMD-LC-12F

12F MM (OM3/4) SC Duplex Adapter Plate (Aqua)



SF-AP-OM3D-SC-12F

12F MM (OM3/4) LC Duplex Adapter Plate (Aqua)



SF-AP-OM3D-LC-12F

6F MM PHOS ST Adapter Plate (Bronze)



SF-AP-OM3S-ST-6F

Rack Mount Enclosures

1U Rack Mount Enclosure

max capacity (3) adapter plates (Black)

- 1 rack-unit high (1U)
- 1.73"H x 19"W x 10.87"D (15 lbs)
- Accepts up to (3) standard LGX-style adapter plates or cassettes
- Front and rear access



SF-PP-RM-1U

2U Rack Mount Enclosure

max capacity (6) adapter plates (Black)

- 2 rack-unit high (2U)
- 3.46"H x 18.9"W x 13.78"D (22 lbs)
- Accepts up to (6) standard LGX-style adapter plates or cassettes
- Front and rear access



SF-PP-RM-2U

Wall Mount Enclosures

Wall Mount Enclosure

max capacity (1) adapter plate (Black)

- 1.25"H x 5.5"W x 6.3"D (2 lbs)
- Accepts up to (1) standard LGX-style adapter plate
- 12F splice chip included
- Reduced profile space saving design



SF-6PWMFP

Wall Mount Enclosure

max capacity (2) adapter plates (Black)

- 3.555"L x 9.25"W x 13.0"D (7 lbs)
- Compact, efficient design
- Stackable
- Accepts up to (2) standard LGX-style adapter plates



SF-12PWMFP

HDMI Splitters



SSAB-SP1X2HDMI

1x2 HDMI Splitter

- Distributes 1 HDMI source to 2 HDMI displays
- Supports resolution up to 4K UHD
- Supports HDR 18Gbps
- Supports EDID function
- Plug and play

4K **HDR**
UHD High-Dynamic Range



SSAB-SP1X4HDMI

1x4 HDMI Splitter

- Distributes 1 HDMI source to 4 HDMI displays
- Supports resolution up to 4K UHD
- Supports HDR 18Gbps
- Supports EDID function
- Plug and play

4K **HDR**
UHD High-Dynamic Range



SSAB-SP1X8HDMI

1x8 HDMI Splitter

- Distributes 1 HDMI source to 8 HDMI displays
- Supports resolution up to 4K UHD
- Supports HDR 18Gbps
- Supports EDID function
- Plug and play

4K **HDR**
UHD High-Dynamic Range

HDMI Switcher



SSAB-SW3X1HDMI

3x1 HDMI Switcher

- Switch easily between any 3 HDMI sources
- Supports resolution up to 4K UHD
- Bandwidth supports up to 18Gbps
- Supports IR control, remote included
- Plug and play

4K **HDR**
UHD High-Dynamic Range

HDMI Extenders



1080p HDMI 1.3 Extender over CAT5e/6 with IR

- Includes a transmitter unit (TX) and a receiver unit (RX), working as a pair
- Transmits 1080p signal up to 60 meters with CAT5e/CAT6 or higher cable
- IR remote supports 20-60Khz
- Supports EDID function



4K HDMI 2.0 Extender over CAT5e/6 with IR

- Includes a transmitter unit (TX) and a receiver unit (RX), working as a pair
- Transmit 4K signal up to 70 meters with CAT5e/CAT6 or higher cable
- Transmitter works as a splitter with a HDMI loopout
- IR remote supports 20-60Khz
- Supports EDID function

4K HDR
UHD High-Dynamic Range



4K HDMI 2.0 KVM Extender over CAT5e/6 with IR

- Includes a transmitter unit (TX) and a receiver unit (RX), working as a pair
- Transmit 4K signal up to 60 meters with CAT5e/CAT6 or higher cable
- Transmitter works as a splitter with a HDMI loopout
- Receiver works as a splitter with 2 HDMI outputs
- Controls keyboard and mouse
- IR remote supports 20-60Khz
- Supports EDID function

4K HDR
UHD High-Dynamic Range



1080p Wireless HDMI Extender

- Includes a transmitter unit (TX) and a receiver unit (RX), working as a pair
- Support HDCP 1.3
- Support standard IEEE802.11a/b/g/n
- Support the highest rate 1.485G and TMDS clock up to 148.5 Mhz
- Working in 2.4G/5G frequency band, not easily disturbed to wireless signals
- The maximum range is 150 meters in open space without any obstacles. However, when passing through walls, the typical range is up to 40 meters.

Hinged Wall Equipment Racks

19" standard installation, easy operation and maintaining at the back, double section welded frame structure. Tempered glass front door with wider than 180 degrees turning angle, removable side panels for easy access, easy operation and maintaining at the back, fully assembled



SSYS-WM01-06

6U Locking Glass Door

- 600x550x6U
- Weight: 38.5 lbs (17.5kg)
- 14.57" x 23¾" x 21¾" (HxWxD)



SSYS-WM01-09

9U Locking Glass Door

- 600x550x9U
- Weight: 46.2 lbs (21kg)
- 19¾" x 23¾" x 21¾" (HxWxD)



SSYS-WM01-12

12U Locking Glass Door

- 600x550x12U
- Weight: 57.32 lbs (26kg)
- 25" x 23¾" x 21¾" (HxWxD)

AV Rack Cabinets

Includes locking glass front-door, locking rear door, removable side panels, shelves, blanks, 2" casters and levelling feet, 2 top-mounted DC fans, SPCC cold rolled steel with black powder coat finish, 880lbs (400kg) weight capacity, fully assembled



SSYS-RACK-21

21U AV Rack Cabinet

- 3x 2U-16" shelves
- 3x 2U blank panels
- 40.2" x 23.6" x 23.6" (HxWxD)
- Weight: 122.44 lbs (51kg)



SSYS-RACK-27

27U AV Rack Cabinet

- 4x 2U-16" shelves
- 1 x 2U-18" shelves
- 5 x 2U blank panels
- 50.6" x 23.6" x 23.6" (HxWxD)
- Weight: 144.40 lbs (65.5kg)



SSYS-RACK-36

36U AV Rack Cabinet

- 5 x 2U-16" shelves
- 1 x 2U-18" shelves
- 1 x 3U-20" shelves
- 6 x 2U blank panels + 1 x 3U blank Panel
- 66.5" x 23.6" x 23.6" (HxWxD)
- Weight: 190.70 lbs (86.5kg)



SSYS-RACK-42

42U AV Rack Cabinet

- 5 x 2U-16" shelves
- 2 x 2U-18" shelves
- 2 x 3U-20" shelves
- 7 x 2U blank panels + 2 x 3U blank panels
- 77" x 23.6" x 23.6" (HxWxD)
- Weight: 226 lbs (102.5kg)



SSYS-WM01-15

15U Locking Glass Door

- 600x550x15U
- Weight: 67.24 lbs (30.5kg)
- 30⁵/₁₆" x 23³/₄" x 21³/₄" (HxWxD)



SSYS-WM01-18

18U Locking Glass Door

- 600x550x18U
- Weight: 71.65 lbs (32.5kg)
- 35.43" x 23³/₄" x 21³/₄" (HxWxD)



SSYS-WM01-22

22U Locking Glass Door

- 600x550x22U
- Weight: 84.7 lbs (38.5kg)
- 42.5" x 23³/₄" x 21³/₄" (HxWxD)

Premium AV Rack Cabinets with Silent Fans

Includes locking reversible glass front-door, split locking back-door, removable locking Side Panels, shelves, blanks, 2" casters and levelling feet, 2 top-mounted DC fans, SPCC cold rolled steel with black powder coat finish, fully assembled



SSYS-RACK-21SF

21U AV Rack Cabinet

- 3x 2U shelves
- 3x 2U blank panels
- 40.75" x 23.6" x 22" (HxWxD)
- Weight: 119.71lbs (54.3kg)
- Weight capacity: 750lbs (340kg)



SSYS-RACK-42SF

42U AV Rack Cabinet

- 7x 2U shelves
- 2 x 5U shelves
- 9 x 2U blank panels
- 77.5" x 23.6" x 22" (HxWxD)
- Weight: 223.80lbs (101.5kg)
- Weight capacity: 1100lbs (499kg)



Server Cabinet with **Mesh** Doors

Includes locking front and rear steel mesh doors, removable side panels with locks, 2.5" casters and levelling feet, 4 top-mounted DC fans, all steel construction, SPCC cold rolled steel with black powder coat finish, 2866lbs (1300kg) weight capacity, fully assembled



SSYS-RACK-24-SV

24U Server Cabinet with Mesh Doors

50" x 23⁵/₈" x 39³/₈" (HxWxD)

- Weight: 187lbs (85kg)



SSYS-RACK-42-SV

42U Server Cabinet with Mesh Doors

81⁹/₁₆" x 23⁵/₈" x 39³/₈" (HxWxD)

- Weight: 253.5lbs (115kg)

Adjustable Wall Mount Racks

19" standard installation, the adjustable hinge gives you the flexibility to set the depth from 12" to 18". Mounting holes located on the back with all hardware included.

SSYS-RU1

1U Wall Mount

- Dual stud
- H2" x W20.5" x D12-18"
- **Expandable to 18"**
- 2mm Metal Thickness



SSYS-RU2

2U Wall Mount

- Dual stud
- H3.77" x W20.5" x D12-18"
- **Expandable to 18"**
- 2mm Metal Thickness



SSYS-RU4

4U Wall Mount

- Dual stud
- H7.27" x W20.5" x D12-18"
- **Expandable to 18"**
- 2mm Metal Thickness



SSYS-RU8

8U Wall Mount

- Dual stud
- H14.25" x W20.5" x D12-18"
- **Expandable to 18"**
- 2mm Metal Thickness



Plastic Enclosures with Lid and Frame – Low Profile

- Designed to integrate wireless devices without interference
- Made with UL 2416 Listed fire retardant ABS plastic
- Vented cover with reversible hinged door
- Grommets & mounting hardware include



SSYS-PE18

18" Plastic Enclosure

- 23" x 18.4" x 5.15" (HxWxD)
- Weight: 6.17lbs (2.8kg)



SSYS-PE28

28" Plastic Enclosure

- 33.2" x 18.4" x 5.15" (HxWxD)
- Weight: 8.15lbs (3.7kg)



SSYS-PE42

42" Plastic Enclosure

- 46.3" x 18.4" x 5.15" (HxWxD)
- Weight: 10.36lbs (4.7kg)

Metal Enclosures with Lid and Frame – Low Profile

Steel Powder Coated Enclosure with Hinged Cover
(White Mount Kit & Keylock Included)



SSYS-PVEB014

14" Enclosure

- (No hinged cover)
- 14" x 14" x 4" (HxWxD)



SSYS-PVEB118

18" Enclosure

- 18" x 14" x 4" (HxWxD)



SSYS-PVEB128

28" Enclosure

- 28" x 14" x 4" (HxWxD)



SSYS-PVEB-142

42" Enclosure

- 42" x 14" x 4" (HxWxD)


Open Frame Racks

19" standard installation,
18" deep open frame with
numbered and threaded rails.
Made with SPCC cold rolled
steel and a black powder coat
finish. Screw pack included.



SSYS-WMOF-01-15
15U Wall Mount

- 500x457x15U
- Weight:
18.75 lbs (8.5kg)
- Weight capacity:
220.5lbs (100kg)

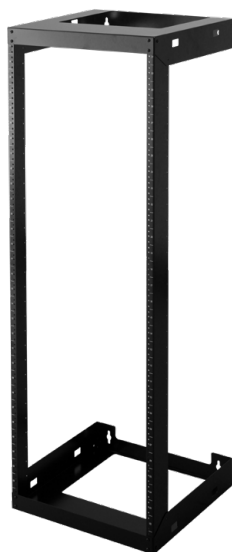

SSYS-WMOF-01-30
30U Wall Mount

- 500x457x30U
- Weight:
40.8 lbs (18.5kg)
- Weight capacity:
220.5lbs (100kg)

Headend Equipment Racks

Open frame with
numbered and threaded
rails. Made with SPCC
cold rolled steel and a
black powder coat finish.



SSYS-148
**27U Headend
Equipment Rack**

- 560x405x27U
- Weight:
29.7lbs (13.5kg)
- Weight capacity:
330lbs (150kg)
- H54" x W22" x D16"



SSYS-1
**45U Headend
Equipment Rack**

- 560x405x45U
- Weight:
39.6lbs (18kg)
- Weight capacity:
330lbs (150kg)
- H85" x W22" x D16"

Shelves & Accessories

Universal Rack Shelf-Vented 1U-12"



SSYS-S1V

Universal Rack Shelf-Vented 1U-14"



SSYS-S1UV

Universal Rack Shelf 2U-14"



SSYS-S2U


Universal Rack Shelf-Vented 2U-14"



SSYS-S2UV

Shelves & Accessories

Universal Rack Shelf-Centre Mount-Vented
2U-19"

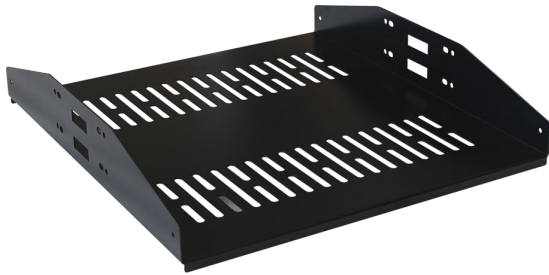

SSYS-S2CM

Universal 1U Sliding Shelf 14" Deep



SSYS-SS1U

Universal Server Rack Shelf-Fixed



SSYS-S1FV

Locking Drawer, 2U-18"



SSYS-DRW2

Universal Blank Panel




1U SSYS-1B

2U SSYS-2B

4U SSYS-4B


Brush Plate Cable Management Panel

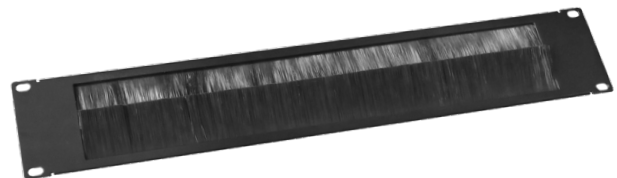

1U SSYS-1BP

2U SSYS-2BP

Vented Front Panel

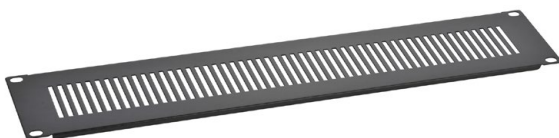

1U SSYS-1VP

2U SSYS-2VP

3U SSYS-3VP

1U Metal Cable Management



SSYS-DRCM1

Accessories

Offset Lacing Bar for 19" Racks



SSYS-1LB

"L" Shape Lacing Bar, 2 Pack



SSYS-02LB-2PK

Cabinet Light LED 6w 400 Lumens



SSYS-LIGHT01

Cooling Fans for Wall Mount Racks – 2 Fans + Power Cable

- 120mm x120mm x 38mm
- 110V high-performance fans (50 CFM each)
- 24.9 dB sound rating (each)
- Oiliness axletree
- 6-foot AC input cord with NEMA plug



SSYS-CF-02

8 Outlet Power Distribution Unit 1U

- Compatible with 19" racks
- 8 Outlet 15A
- 6 ft. cord



SSYS-PD8-1U

8 Outlet Power Distribution Unit 1U

- Compatible with 19" racks
- 8 Outlet 15A
- **Full surge & lightning protection**
- 6 ft. cord



SSYS-PD8-FPL-1U

1U Cooling Fan Shelf for Racks

- 6-foot AC input cord with NEMA plug
- Compatible with 19" racks
- 4-Fans



SSYS-CF-04-1U

Screws for AV Racks #10-32 x 3/4" (50-Pack)



SSYS-1032-50

Side Panel Lock Kit ø19x16.5mm



SSYS-LOCK


2" Casters for Racks (4-Pack)



SSYS-CASTERS

All Sync TV mounts feature quick-release brackets for easy cable connection, post-installation levelling for mounting the TV right the first time and lateral adjustment for precise installation. All mounting hardware is included for wood studs or concrete installation.

Fixed TV Wall Mounts

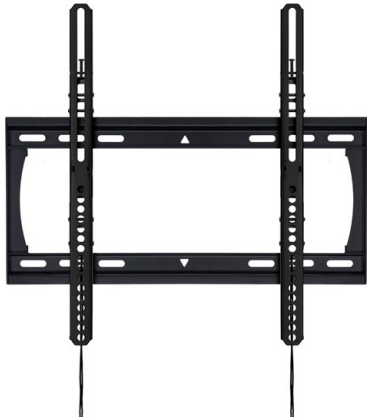

SM-F-3265

32" - 65" Fixed Flush TV Wall Mount

- Fits most 32" to 65" flat panel TV
- Supports flat panel TV up to 120lbs (54.4kg)
- Dimensions (WxHxD): 469.6mm x 432mm x 22.5mm
- Fits standard VESA mounting pattern (WxH)mm
100x100 200x100 200x200 300x200
400x200 300x300 400x300 400x400




Supports up to
120 lbs (54.4kg)



Slim Profile
0.89" (22.5mm)



Post Installation
Levelling

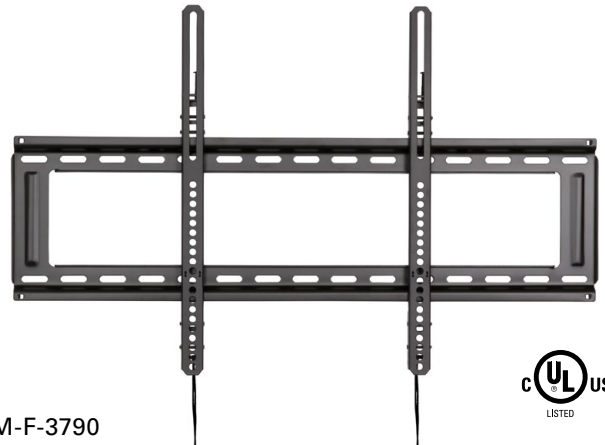

SM-F-3790

37" - 90" Fixed Flush TV Wall Mount

- Fits most 37" to 90" flat panel TV
- Supports flat panel TV up to 175lbs (79.4kg)
- Dimensions (WxHxD): 768.6mm x 482.2mm x 23mm
- Fits standard VESA mounting pattern (WxH)mm
100x100 200x100 200x200 300x200 400x200
300x300 400x300 400x400 600x400 700x400




Supports up to
175 lbs (79.4kg)



Slim Profile
0.91" (23mm)



Post Installation
Levelling

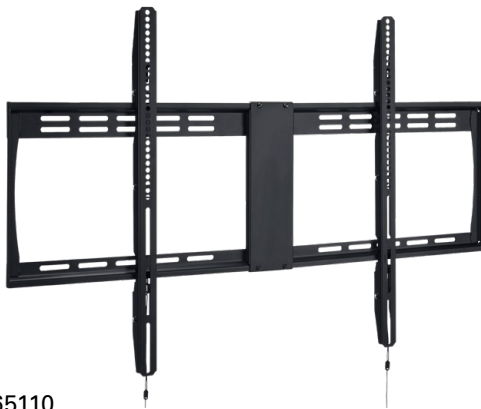

SM-F-65110

65" - 110" Fixed TV Wall Mount

- Fits most 65" to 110" flat panel TV
- Supports flat panel TV up to 250lbs (121kg)
- Dimensions (WxHxD): 1104.1mm x 680.2mm x 28mm
- Fits standard VESA mounting pattern (WxH)mm
200 x 200 mm to 1000 x 600 mm



Supports up to
250 lbs (121kg)



Slim Profile
1.1" (28mm)



Post Installation
Levelling



SM-F-3790UT

37" - 90" Fixed Flush Ultra Thin TV Wall Mount

- Fits most 37" to 90" flat panel TV
- Supports flat panel TV up to 150lbs (68kg)
- Dimensions (WxHxD): 716.9mm x 451mm x 10.2mm
- Fits standard VESA mounting pattern (WxH)mm
100x100 200x100 200x200 300x200 400x200
300x300 400x300 400x400 600x400



Supports up to
150 lbs (68kg)




Slim Profile
0.4" (10.2mm)



Post Installation
Levelling

Tilting TV Wall Mounts

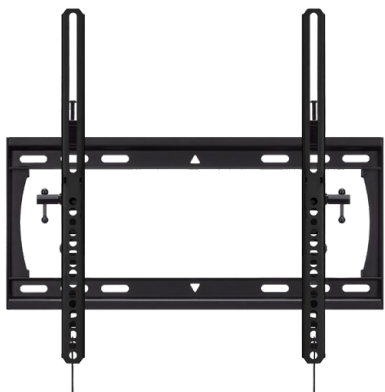


SM-T-3265



32" - 65" Tilting TV Wall Mount

- Fits most 32" to 65" flat panel TV
- Supports flat panel TV up to 120lbs (54.4kg)
- Dimensions (WxHxD): 469.6mm x 431mm x 50.2mm
- Fits standard VESA mounting pattern (WxH)mm
100x100 200x100 200x200 300x200 400x200
300x300 400x300 400x400

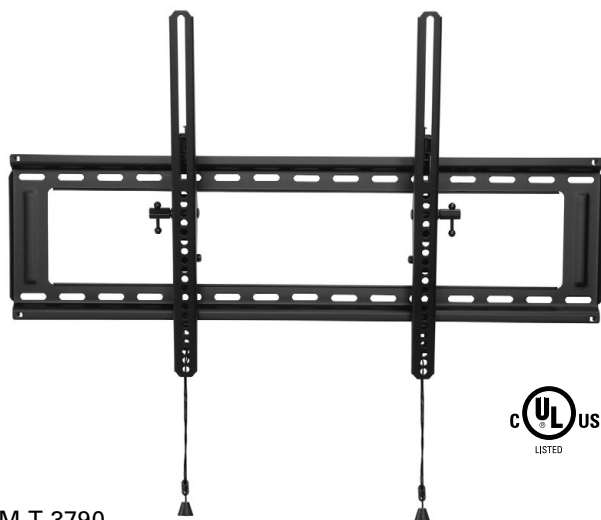


SM-T-3790



37" - 90" Tilting TV Wall Mount

- Fits most 37" to 90" flat panel TV
- Supports flat panel TV up to 175lbs (79.4kg)
- Dimensions (WxHxD): 768.6mm x 480mm x 50.8mm
- Fits standard VESA mounting pattern (WxH)mm
100x100 200x100 200x200 300x200 400x200
300x300 400x300 400x400 600x400 700x400

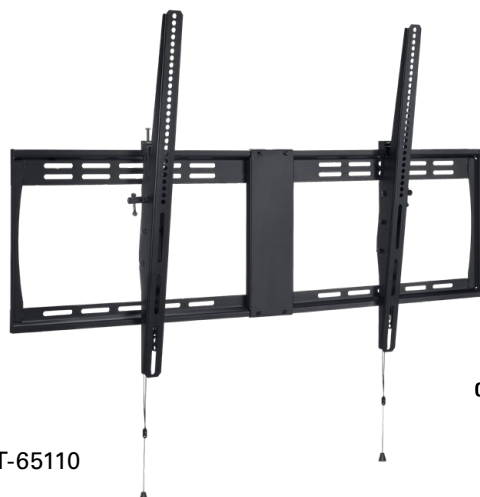

SM-T-65110



65" - 110" Tilting TV Wall Mount

- Fits most 65" to 110" flat panel TV
- Supports flat panel TV up to 250lbs (121kg)
- Dimensions (WxHxD): 1104.1mm x 680.2mm x 62.3mm
- Fits standard VESA mounting pattern (WxH)mm
200 x 200 mm to 1000 x 600 mm



Tilting TV Ceiling Mount




SM-CM-4390

SYN(MOUNT™)

43" - 90" Tilting TV Ceiling Mount

- Fits most 43" to 90" flat panel TV
- Supports flat panel TV up to 125lbs (56.7kg)
- Dimensions (WxHxD): 600mm x 865.1mm x 79.9mm
- Fits standard VESA mounting pattern (WxH)mm
100x100 200x100 200x200 300x200 400x200
300x300 400x300 400x400 600x400




Tilting-Extension TV Wall Mounts



SM-TE-4390

43" - 90" Tilting-Extension TV Wall Mount


- Fits most 43" to 90" flat panel TV
- Supports flat panel TV up to 120lbs (54.4kg)
- Dimensions (WxHxD): 750mm x 290mm x 50-196mm
- Fits standard VESA mounting pattern (WxH)mm
200x100 200x200 300x200 400x200
300x300 400x300 400x400 600x400

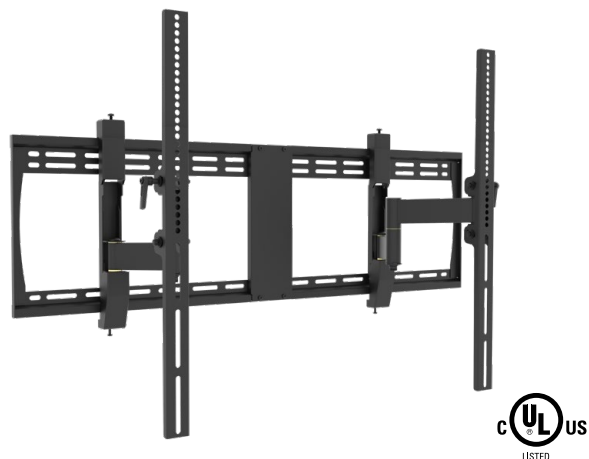

SM-TE-65110

65" - 110" Tilting-Extension TV Wall Mount

- Fits most 65" to 110" flat panel TV
- Supports flat panel TV up to 175lbs (79kg)
- Dimensions (WxHxD): 1104mm x 680mm x 61-324.9mm
- Fits standard VESA mounting pattern (WxH)mm
300 x 200 mm to 1100 x 600 mm



Full Motion Single Stud TV Wall Mount



SM-FMSS-3765



37" - 65" Full Motion Wall Mount

- Fits most 37" to 65" flat panel TV
- Supports flat panel TV up to 70lbs (31.8kg)
- Dimensions (WxHxD): 430mm x 430mm x 50.8-523.2mm
- Fits standard VESA mounting pattern (WxH)mm
100x100 mm to 400x400 mm



Supports up to
70 lbs (31.8kg)



Post Installation
Levelling

Full Motion Dual Stud TV Wall Mounts



SM-FMDS-4390



43" - 90" Full Motion TV Wall Mount

- Fits most 43" to 90" flat panel TV
- Supports flat panel TV up to 130lbs (59kg)
- Dimensions (WxHxD): 701.7mm x 430mm x 66-635mm
- Fits standard VESA mounting pattern (WxH)mm
200x100 200x200 300x200 400x200 300x300
400x300 400x400 600x400



Supports up to
130 lbs (59kg)



Swivel



Slim Profile
2.6"-25"(66-635mm)



Easy
Tilting



Post Installation
Levelling



SM-FMDS-5590



55" - 90" Full Motion TV Wall Mount

- Fits most 55" to 90" flat panel TV
- Supports flat panel TV up to 150lbs (68kg)
- Dimensions (WxHxD): 799mm x 532mm x 60-760mm
- Fits standard VESA mounting pattern (WxH)mm
200x100 200x200 300x200 400x200 300x300
400x300 400x400 600x400 700x400 700x500



Supports up to
150 lbs (68kg)



Slim Profile
2.36"-30"(60-760mm)



Easy
Tilting



Post Installation
Levelling

Outdoor Speakers

4" Weatherproof Landscape Speaker

4" Woofer + 0.75" Tweeter



4" 8Ω 30 watts

SS-LSS-4

- Drivers: 4" woofer + 0.75" tweeter
- Frequency response: 70 – 20,000 Hz
- Sensitivity: 84dB
- Adjustable 70v Transformer Taps: 16W-8W-4W-2W-8 ohm
- Speaker dimension: 190mm x 138mm x 138mm (HxWxD)

8" Outdoor Below Ground Subwoofer




8" 8Ω 160 watts

SS-SUB-OD

- Drivers: 8"
- Frequency response: 40 – 20,000 Hz
- Sensitivity: 82dB
- Speaker dimension: 710mm x 440mm x 490mm (HxWxD)

8" Weatherproof Rock Speakers

8" Woofer + 0.5" Tweeter

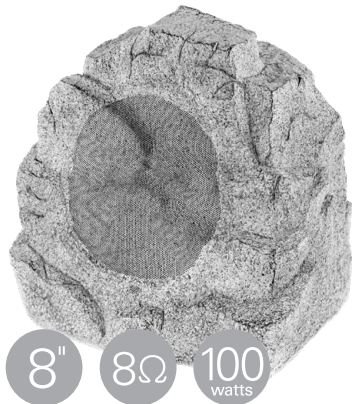

8" 8Ω 100 watts

SS-ROCK8-2GY (Grey)

- Drivers: 8" woofer + 0.5" tweeter
- Frequency response: 35 – 20,000 Hz
- Sensitivity: 88dB
- Speaker dimension: 340mm x 295mm x 290mm (HxWxD)

6.5" Indoor/Outdoor Speaker – Pair

6.5" Woofer + 1" Tweeter



6½" 8Ω 100 watts

SS-MC60-BK (Black)

SS-MC60-WH (White)

- Drivers: 6.5" woofer + 1" tweeter
- Frequency response: 50 – 20,000 Hz
- Sensitivity: 90dB
- Speaker dimension: 302mm x 196mm x 193mm (HxWxD)

In-Ceiling Speaker

With adjustable tweeter and paintable magnetic grill.

5.25" In-Ceiling Speaker – Pair

5.25" Woofer + 0.5" Tweeter



SS-ICS-5

5¼"

8Ω

60
watts

- 5.25" woofer + 0.5" tweeter
- 60 – 20,000 Hz frequency response
- Sensitivity (1m, 1W): 88dB
- Speaker dimension: 204mm x 92mm (Ø x H)
- Cut-out dimension: Ø 178mm
- Thin-bezel rimless grill held by neo magnets

6.5" In-Ceiling Speaker – Pair

6.5" Woofer + 0.5" Tweeter



SS-ICS-6

6½"

8Ω

70
watts

- 6.5" woofer + 0.5" tweeter
- 50 – 20,000 Hz frequency response
- Sensitivity (1m, 1W): 89dB
- Speaker dimension: 232mm x 92mm (Ø x H)
- Cut-out dimension: Ø 200mm
- Thin-bezel rimless grill held by neo magnets

6.5" In-Ceiling Speaker – Pair

6.5" **Kevlar** Woofer + 1" Tweeter



SS-ICS-6-5KV

6½"

8Ω

100
watts

- 6.5" Kevlar woofer + 1" tweeter
- 50 – 20,000 Hz frequency response
- Sensitivity (1m, 1W): 89dB
- Speaker dimension: 232mm x 92mm (Ø x H)
- Cut-out dimension: Ø 200mm
- Thin-bezel rimless grill held by neo magnets

6.5" In-Ceiling Dual Voice Coil Speaker

6.5" Woofer + 2 x 0.5" Tweeter



SS-ICS-6-DVC

6½"

8Ω

80
watts

- 6.5" woofer + 2 x 0.5" tweeter
- 40 – 20,000 Hz frequency response
- Sensitivity (1m, 1W): 89dB
- Speaker dimension: 232mm x 92mm (Ø x H)
- Cut-out dimension: Ø 200mm
- Thin-bezel rimless grill held by neo magnets

8" In-Ceiling Speaker – Pair

8" Woofer + 0.5" Tweeter



SS-ICS-8

8"

8Ω

90
watts

- 8" woofer + 0.5" tweeter
- 35 – 20,000 Hz frequency response
- Sensitivity (1m, 1W): 90dB
- Speaker dimension: 282mm x 105mm (Ø x H)
- Cut-out dimension: Ø 248mm
- Thin-bezel rimless grill held by neo magnets

6.5" In-Ceiling Speaker

6.5" Woofer + 0.5" Tweeter



SS-ICS-6E

6½"

8Ω

70
watts

- 6.5" woofer + 0.5" tweeter
- 40 – 20,000 Hz frequency response
- Sensitivity (1m, 1W): 89dB
- Speaker dimension: 232mm x 198mm (Ø x H)
- Cut-out dimension: Ø 200mm
- Thin-bezel rimless grill held by neo magnets

6.5" Thin Bezel, Rimless Grill In-Wall Speaker – Pair

6.5" **Kevlar** Woofer + 1" Tweeter



SS-IWS-6S

6½"

8Ω

100
watts

- 6.5" Kevlar woofer + 1" tweeter
- Frequency response: 45 – 20,000 Hz
- Sensitivity: 88dB
- Speaker dimension: 306mm x 219mm x 85mm (HxWxD)
- Cut-out dimension: 278mm x 190 mm (HxW)

6.5" Thin Bezel, Rimless Grill In-Wall Speaker

6.5" **Kevlar** Woofer x2 + 1" Tweeter



SS-LCR-6

2x
6½"

8Ω

80
watts

- 6.5" Kevlar woofer x2 + 1" tweeter
- Frequency response: 50 – 20,000 Hz
- Sensitivity: 88dB
- Speaker dimension: 100mm x 481mm x 210mm (HxWxD)
- Cut-out dimension: 458mm x 188.5mm (WxH)

Subwoofers & Accessories

8" High Performance Powered Subwoofer

- Drivers: 8" reinforced
- 45Hz – 150Hz frequency response
- Adjustable from 50Hz – 150Hz lowpass crossover
- Amplifier and speaker input

8" 100 watts RMS



SS-SUB-8P

10" High Performance Powered Subwoofer

- Drivers: 10" reinforced
- 40Hz – 150Hz frequency response
- Adjustable from 50Hz – 150Hz lowpass crossover
- Amplifier and speaker input

10" 150 watts RMS



SS-SUB-10P

In-Ceiling Speaker Bracket

The SS-ICB is a pre-construction kit that can be easily attached to any joist or stud with virtually no rise in drywall depth.

*Must be installed before the drywall.



for 5.25" Speakers
Ø 178mm

for 6.5" Speakers
Ø 200mm

for 8" Speakers
Ø 248mm

SS-ICB-5

SS-ICB-6


SS-ICB-8

Impedance Matching 75w Slider Volume Control – White



SS-VC75I-S-W

Square Replacement Grills for 6" In-Ceiling Speakers



SS-SQ6-GR

Digital Audio to Stereo Audio Converter with Loopout Function



SS-DA-AN-02

Digital To Analog (DAC):

- Coaxial or optical digital input, with coaxial taking priority
- Dual analog L/R output (RCA)
- Digital input: coaxial & optical
- Supported LPCM digital audio format
- Input impedance: 75 ohm
- Minimum load impedance: 10K ohm
- Sampling rate: 32 KHz – 192 KHz
- DC input voltage/polarity: 12V / center positive
- Dimensions (LxWxH): 88.4mm x 64.5mm x 29mm

Stereo Class D Audio Amplifier with IR Remote Control



SS-STPA-01

- Manual or remote volume control
- Standby (red) / ON (green) indicator
- Screw terminals for 24-12 gauge wire
- Speaker protection circuit
- Dimensions (WxDxH): 145mm x 97mm x 41mm

Speaker Selectors

6 Zone Low-Profile Speaker Selector



SS-S6-I

- Protection circuit high power resistors: 2 x 10 Ohm/15 Watt per channel
- Power handling with protection circuit
ON: 70 Watts/CH. OFF: 140 Watts/ch.
- Dimensions (WxDxH): 433mm x 112mm x 49mm

6 Zone Speaker Selector with Volume Controls – Dual Source

6 Zone dual source automatic impedance matching speaker selector with individual volume control



SS-S6VC-I

- A/B speaker selector
- Audio power handling: 100 Watts/Channel (peak)
- Frequency response: 20Hz – 20kHz
- Input Source: up to 2 amplifiers
- Dimensions (WxDxH): 430mm x 158mm x 64mm

3.5mm Stereo Audio CAT-5 Extender



SSAV-EX3-5-2

- Extend audio signal up to 75M (250 ft) using CAT-5, 5e or 6 network cable.
- Set of 2 audio baluns – transmitter x1 and receiver x1
- For analog stereo audio
- Bi-directional so each end can either transmit or receive
- Plug and play

RCA Stereo Audio CAT-5 Extender



SSAV-EXRCA-2

- Extend audio signal up to 75M (250 ft) using CAT-5, 5e or 6 network cable.
- Set of 2 audio baluns – transmitter x1 and receiver x1
- For analog stereo audio
- Bi-directional so each end can either transmit or receive
- Plug and play

Indoor Extension Cords

2-Prong Plug

- Polarized 2-prong plug
- 3-outlet connector
- Low profile cord
- Right angle plug for tight spaces
- SPT-2 AWG 16/2
- 13A / 125V / 1625W



6FT

- SP-EXT2-6WH (White)
- SP-EXT2-6BK (Black)

10FT

- SP-EXT2-10WH (White)
- SP-EXT2-10BK (Black)

3-Prong Plug

- Polarized 3-prong plug
- 3-outlet connector
- Low profile cord
- Right angle plug for tight spaces
- SPT-2 AWG 16/3
- 13A / 125V / 1625W



1.5FT

- SP-EXT3-1-5BK (Black)

6FT

- SP-EXT3-6WH (White)

10FT

- SP-EXT3-10WH (White)
- SP-EXT3-10BK (Black)

Power Bars

6-Outlet Power Bar

- Built-in circuit breaker
- Lighted On/Off switch
- Right angle plug
- Indoor use only
- 15A / 125V / 1875W



- SP-6PB-W (White)

3FT

- SP-6PB (Black)



6-Outlet Power Bar with Surge Protector

- **400 or 750 joule** surge protection
- Red LED indicator shows surge protection is functioning
- Built-in circuit breaker
- Lighted On/Off switch
- Right angle plug
- Indoor use only
- 15A / 125V / 1875W



- SP-6FS-400J-W (White)

3FT 400J

- SP-6FS-400J (Black)

6FT 750J

- SP-6FS-750J-W (White)

- SP-6FS-750J (Black)



6-Outlet **Metal** Power Bar with Surge Protector



6FT 1150J

SP-6FSM-1000J

- **1150 joule** surge protection
- Heavy-duty metal housing
- Red LED shows surge protection is functioning
- Green LED shows surge protector is properly grounded
- Lighted On/Off switch
- Built-in circuit breaker
- Right angle plug
- 4 standard grounded outlets & 2 wide-spaced outlets for transformer-sized plugs
- Indoor use only
- 15A / 125V / 1875W



12 Outlet 4ft. Wide **Metal** Power Bar



6FT

SP-12PB-M

- 12 Wide-Spaced Outlets fit Transformer-Sized Plugs
- Heavy-Duty Metal Housing
- 6ft Power Cord
- Lighted On/Off Switch with Built-In Circuit Breaker Protects Against Overloads
- Mounting Slots on the Ends and Back of the Housing
- Mounting Hardware Included
- Indoor Use Only
- 15A / 125V



Power Supply Cords

SJTW Weatherproof Extension Cord

- Polarized 3-prong plug
- 1-outlet connector
- Weatherproof
- SJTW AWG 16/3
- 13A / 125V / 1625W

10FT

- SP-EX163-10WH (White)
- SP-EX163-10BK (Black)

25FT

- SP-EX163-25WH (White)
- SP-EX163-25BK (Black)



Business Machine Cord

- Polarized 3-prong plug
- 1-outlet connector
- For indoor use in dry location
- SVT AWG 18/3
- 10A / 125V 1250W

6FT

- SP-CH05 (Black)



SJT Power Cords

- Polarized 3-prong plug
- SJT AWG 14/3
- 15A / 125V / 1875W

6FT

- SP-PSV143-6BK (14-3c Black)

9FT

- SP-PSV143-9BK (14-3c Black)

6FT


- SP-PSV163-6BK (16-3c Black)

9FT

- SP-PSV163-9BK (16-3c Black)

6FT

- SP-PSV183-6BK (18-3c Black)

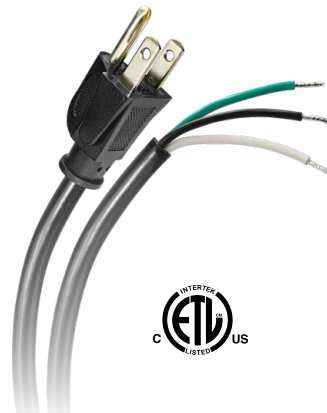

SVT Power Cords

- Polarized 3-prong plug
- SVT AWG 18/3
- 10A / 125V 1250W

6FT

- SP-PLC183-6BK (Black)



 SYN(CABLE™

 SYN(CONNECT™

 SYN(SYSTEM™

 SYN(FIBER™

 SYN(MOUNT™

 SYN(SOUND™

 SYN(POWER™

 SYN(AV™

Distributed in Canada by

PROVO  LTD.
LTÉE.

620 Rowntree Dairy Rd.
Woodbridge, ON L4L 5T8
1-888-797-7686

401 Rue Locke
Saint Laurent, QC H4T 1X7
1-800-361-7349