


SW-HDMI-4K-xxM (0.5M,1M,2M,3M,4M,5M,6M,8M)



HDMI V2.0 4K Full HD with Ethernet

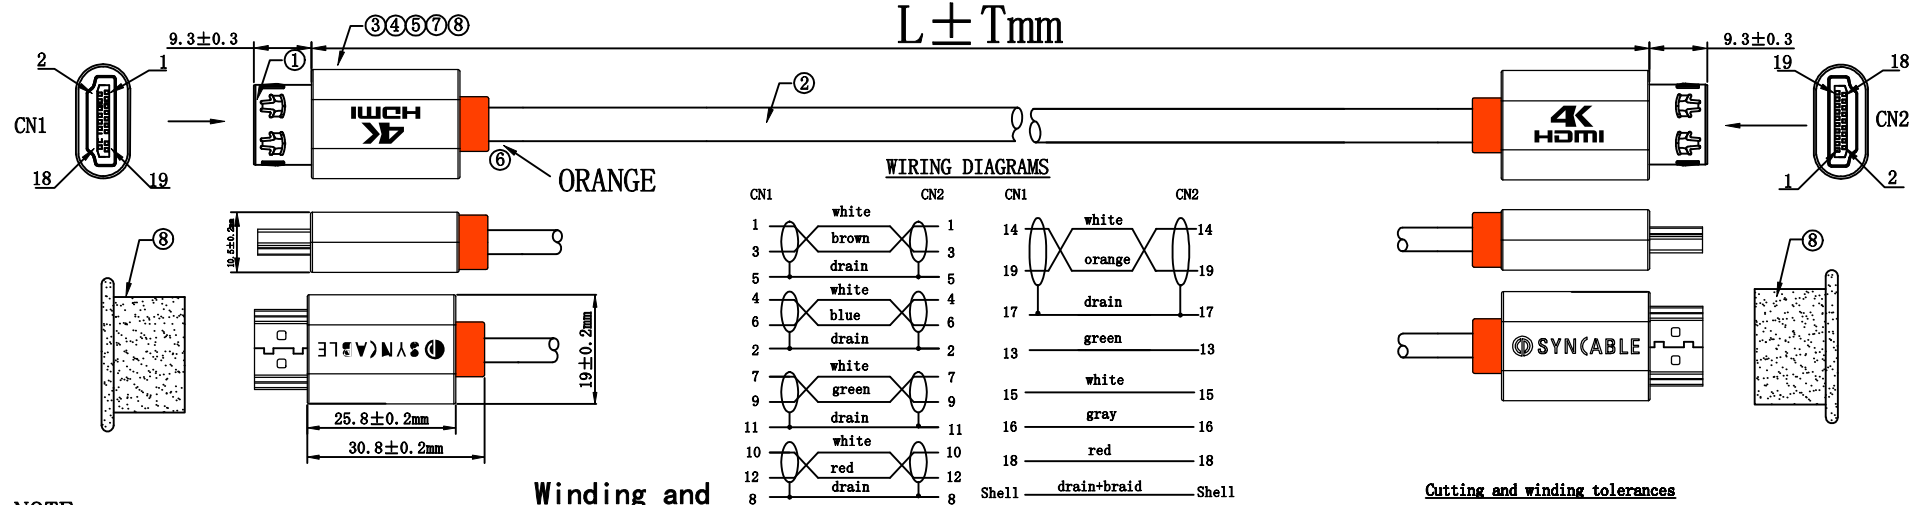

NOTE:

1. ELECTRICAL TEST:

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC 300V 10Mohm min;
- (3). Contact resistance: * ohm Max;
- (4). Compression strength: Alternating Voltage: 200V/S, 1mA;

2. RoHS & REACH ;

3. Printing content: SYN(CABLE) • 4K HDMI 2.0 Cable with Ethernet • 4K@60Hz
4. 100% BY 4K*2K@60Hz.


MATERIAL LIST:

⑩	Seizing Wire	COLOR:Black	2pcs
⑨	Dust cover	Undivided edge dust Jacket (transparent color)	2pcs
⑧	Crepe paper	The width of the essay paper (L=**mm)	2pcs
⑦	Tin strip/tin wire	Tin strip / tin wire	*g
⑥	Copper foil	Double-sided conductive strongly viscous copper foil	2pcs
⑤	Over Molding	PVC/Color:orange	*g
④	Inner Molding	LDPE endometrial material	*g
③	Wire clip	Automatic welding clamp 30AWG Black (with single strand copper)	2pcs
②	Cable	HDMI2.0 BC+AEB Jacket:PVC Color:BLACK 128#/0.12mm/AL-MG, (1/0.254BC*1P+E+AM)*5P+1*0.254BC*4C+AEB OD:6.0±0.2mm	1pcs
①	HDMI conn	HDMI-AM , PIN gold plated FU, Gold plating shell.	2pcs

Cutting and winding tolerances

length	Cutting line tolerance	The winding tolerance
0.5M	500±15mm	100±10mm
1M	1000±20mm	120±10mm
2M	2000±30mm	120±10mm
3M	3000±50mm	130±10mm
4M	4000±100mm	130±10mm
5M	5000±100mm	140±10mm
6M	6000±200mm	140±10mm
8M	8000±200mm	150±10mm

WIRE DETAILS:

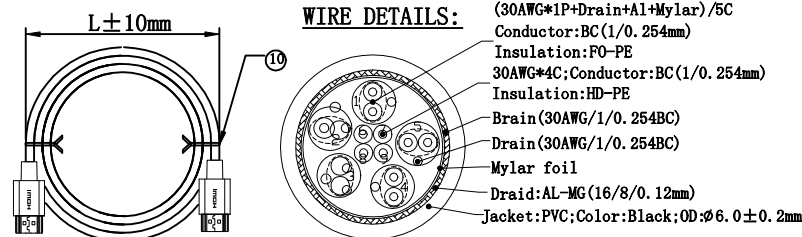

Distributed in Canada by



620 Rowntree Dairy Rd.
Woodbridge, Ontario L4L 5T8
1-888-797-7686

401 Rue Locke
St. Laurent, Que. H4T 1X7
1-800-361-7349